

RapidRail®



Product Specifications:

- C-profile which features continuous perforation
- For quick and easy installation
- The distance between rail end and first hole is always equal
- Continuous graduated centimeter scale on one side
- Unique perforation on rail WM15 allows for hanging on both sides
- Yield stress 34,809 pounds/square inch
- Material: Steel 1.0242, pre-galvanized



Insert, lock, done - The accessories are pre-assembled and delivered 'ready to use' to site. The plastic spring allows the slide nut to be fixed into the rail easily.




Extensive system - The RapidRail® System offers a choice of rail profiles and cantilever arms plus an extensive range of accessories for pipe fitting and rail construction.



Easy fitting - RapidRail® WM15 has a unique hole pattern allowing the accessories to be used on both sides of the rail. The distance between the rail end and the first hole is always even.

Item Number	Type	Length (inches)	# of items per bundle	# of items per pallet
65059502	WM15	10	20	-
65059505	WM15	20	10	-
65059510	WM15	39	10	-
6505015	WM15	78	10	240

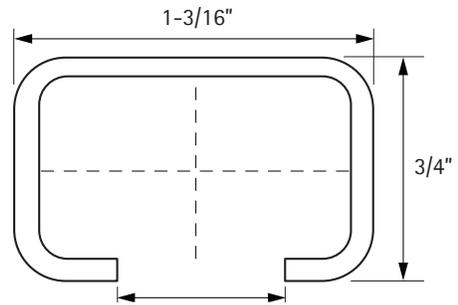

PRODUCT SUBMITTAL		Date:	Architect / Owner:
Job Name:			
		Contractor:	
Part No.	Qty:	Notes:	

THE INFORMATION CONTAINED IN THIS SUBMITTAL SHEET IS PROPRIETARY TO WALRAVEN, INC. AND IS SUBJECT TO CHANGE WITHOUT NOTICE. THIS INFORMATION MAY NOT BE REPRODUCED IN PART OR WHOLE WITHOUT WRITTEN AUTHORIZATION FROM WALRAVEN, INC.

