

## BISMAT® Flash Clamp



### Product Specifications:



- For use with all metal pipes
- Suitable for fitting all types of metal pipes 3/8" up to and including 2"
- Single screw clamp installs with one hand
- Features our patented quick-locking system
- Due to the locking screw feature, no tools are required for installation
- Since the locking screw is manually closed, there is minimal rubber compression: this results in better absorption of noise and vibration.
- Noise and vibration reducing lining according to DIN 4109
- Plenum rated - tested to ASTM E-84
- Tested for fire safety
- Materials: zinc plated steel 1.0037, age resistant lining: EPDM rubber

NOISE REDUCING



Item Number	D (mm)	D / CTS (inches)	D / IPS (inches)	B (inches)	b (inches)	G (inches)	H (inches)	h (inches)	Fa,z (lbs)	Items per pkg
CR3379018	15-18	1/2	3/8	1.9	0.79	3/8	1.4	0.87	180	50
CR3379023	20-22	3/4	1/2	2.1	0.79	3/8	1.5	0.91	180	50
CR3379028	25-28	1	3/4	2.3	0.79	3/8	1.7	1.00	180	50
CR3379035	32-35	1-1/4	1	2.6	0.79	3/8	2.0	1.20	180	50
CR3379043	40-43	1-1/2	1-1/4	2.9	0.79	3/8	2.4	1.30	180	50
CR3379051	48-51	-	1-1/2	3.2	0.79	3/8	2.6	1.50	180	50
CR3379056	53-56	2	-	3.3	0.79	3/8	3.0	1.60	180	50
CR3379063	57-63	-	2	3.6	0.79	3/8	3.2	1.80	180	50

The maximum allowed load (Fa,z) is calculated using specific statistical methods related to the breaking load, taking into account a deflection of 0.060" (1.5mm) or 2% of the maximum nominal clamp diameter. The test results are certified and monitored by an independent test institute.

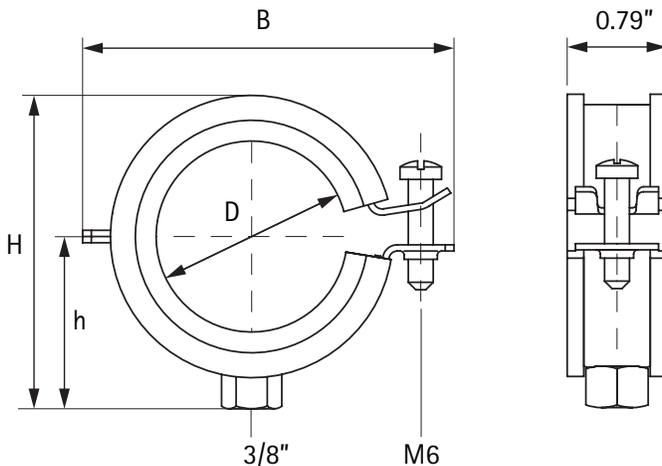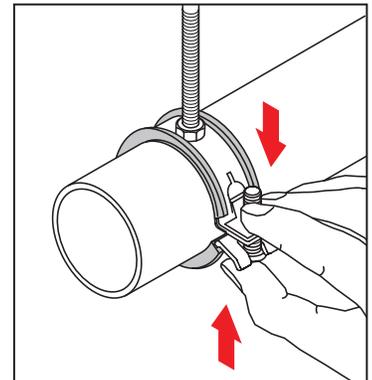

\* Testing reports available upon request

### PRODUCT SUBMITTAL

Job Name:	
Date:	
Part No.	Qty:
Architect / Owner:	
Contractor:	
Notes:	

THE INFORMATION CONTAINED IN THIS SUBMITTAL SHEET IS PROPRIETARY TO WALRAVEN, INC. AND IS SUBJECT TO CHANGE WITHOUT NOTICE. THIS INFORMATION MAY NOT BE REPRODUCED IN PART OR WHOLE WITHOUT WRITTEN AUTHORIZATION FROM WALRAVEN, INC.

