

BIS Trubkové třmeny (hdg)

pro ocelové potrubí 21,5 - 60,3 mm



(B 30 10)



Vlastnosti a výhody

- jednodílný třmen
- žárový zinek
- materiál: ocel

Výr. č.	D (mm)	D (")	DN	B (mm)	H (mm)	k (mm)	F _{a,z} (N)	M.Bal.	Hmot./MJ (g)
4601021	21,5	1/2	15	70	23	50	3 500	50	25.50
4601027	26,9	3/4	20	78	28	58	3 500	50	33.00
4601033	33,7	1	25	82	34	62	3 500	50	36.00
4601043	42,5	1 1/4	32	92	44	72	3 500	50	43.10
4601048	48,0	1 1/2	40	97	47	77	3 500	50	47.90
4601061	60,3	2	50	108	58	88	3 500	50	60.00

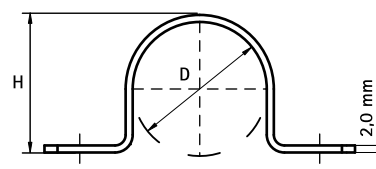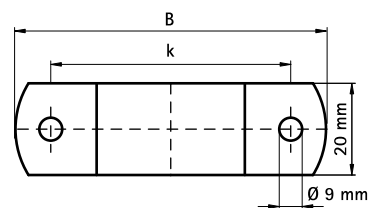

Doplňky

Walraven Hmoždinky a kotvy

Alternativa

BIS Průmyslové třmeny