


BIS Industri U-rørbeslag

for stålrør 26,9 - 168,3 mm


(B 15 05)

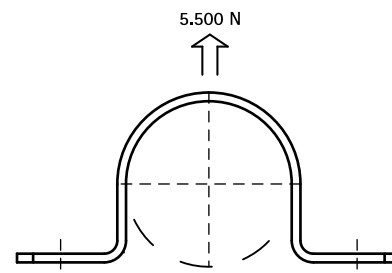

Funktioner og fordele

- sammenhængende u-beslag
- varmforsinket
- materiale: stål

Art.nr.	D (mm)	D (")	DN	B (mm)	H (mm)	b x s (mm)	d1 (mm)	k (mm)	F _{a,z} (N)	Pakke1
4608027	26,9	3/4	20	88	30	25 x 2,5	Ø 9	58	5.500	50
4608033	33,7	1	25	94	36	25 x 2,5	Ø 9	64	5.500	50
4608042	42,4	1 1/4	32	103	45	25 x 2,5	Ø 9	73	5.500	50
4608048	48,3	1 1/2	40	109	51	25 x 2,5	Ø 9	79	5.500	50
4608060	60,3	2	50	120	63	25 x 2,5	Ø 9	90	5.500	50
4608077	76,1	2 1/2	65	137	80	25 x 2,5	Ø 9	107	5.500	50
4608089	88,9	3	80	149	92	25 x 2,5	Ø 9	119	5.500	50
4608110	110	-	-	176	110	30 x 4,0	Ø 11	146	5.500	50
4608114	114,3	4	100	180	118	30 x 4,0	Ø 11	150	5.500	50
4608140	139,7	5	125	206	144	30 x 4,0	Ø 11	176	5.500	25
4608168	168,3	6	150	234	172	40 x 4,0	Ø 11	204	5.500	20

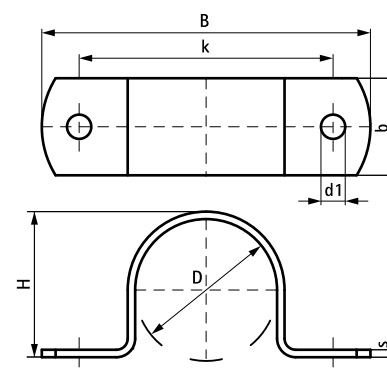

Alternativ
BIS Rørbærer (VG)