


BISOFIX[®] E19

for isolerede rør 12,0 - 219,1 mm


(D 03 14)

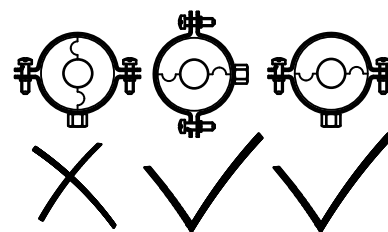

Funktioner og fordele

- til kombination med elastomerisk skumisolering
- vapoursikker kan limes med rørisolering
- indeholder ikke CFC, HCFC, formaldehyd eller cadmium
- brandklasse B2
- PIR densitet for D < 80 mm = 80 kg/m³
- PIR densitet for D > 80 mm = 120 kg/m³
- temperaturområde -45 °C - +105 °C

Art.nr.	VVS nr.	D (mm)	D (")	DN	L	H (mm)	s (mm)	F _{a,z} (N)	Pakke1
I190000012		12,0	-	-	50 mm	50,6	19,3	100	25
I190000015	018059115	15,0	-	-	50 mm	54,0	19,5	100	25
I190000018	018059118	17,2 - 18,0	3/8	10	50 mm	56,6	19,3	100	25
I190000022	018059122	21,3 - 22,0	1/2	15	50 mm	60,6	19,3	100	25
I190000028	018059128	26,9 - 28,0	3/4	20	50 mm	66,6	19,3	100	25
I190000035	018059135	33,7 - 35,0	1	25	50 mm	74,8	19,9	100	25
I190000042	018059143	42,4	1 1/4	32	50 mm	81,0	19,3	150	25
I190000048	018059149	48,3	1 1/2	40	50 mm	88,1	19,9	225	25
I190000054	018059154	54,0	-	-	50 mm	100,0	23,0	225	25
I190000057	018059157	57,0	-	-	50 mm	103,0	23,0	225	25
I190000060	018059160	60,3	2	50	50 mm	100,1	19,9	350	25
I190000064	018059164	64,0	-	-	50 mm	114,6	25,3	350	25
I190000070	018059170	70,0	-	-	50 mm	124,6	27,3	425	25
I190000076	018059176	76,1	2 1/2	65	50 mm	126,7	25,3	575	25
I190000089	018059189	88,9	3	80	50 mm	139,5	25,3	875	25
I190000102	018059192	101,6	-	-	50 mm	152,2	25,3	1.000	25
I190000108	018059190	108,0	-	-	50 mm	158,6	25,3	1.075	25
I190000114	018059191	114,3	4	100	50 mm	164,9	25,3	1.250	25
I190000133		133,0	-	-	100 mm	192,0	29,5	1.475	5
I190000140		139,7	5	125	100 mm	192,1	26,2	1.700	5
I190000160		159,0 - 160,0	-	-	100 mm	210,6	25,3	1.950	5
I190000168		168,3	6	150	100 mm	218,9	25,3	2.125	5
I190000219		219,1	8	200	100 mm	269,7	25,3	3.525	3

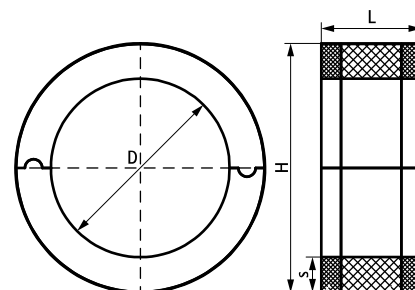

Supplement

Bifix[®] G2 (M8/10) (BUP1000)
 2S Rørbøjle (M8/10)
 Walraven Industri Rørbøjler HD500
 (BUP1000)

Supplement

Walraven Industri Rørbøjler HD500
 (BUP1000)