


BISMAT[®] Flash

for metal pipes $\frac{3}{8}$ - $1\frac{1}{2}$

$\frac{3}{8}$ "

(A 05 200)

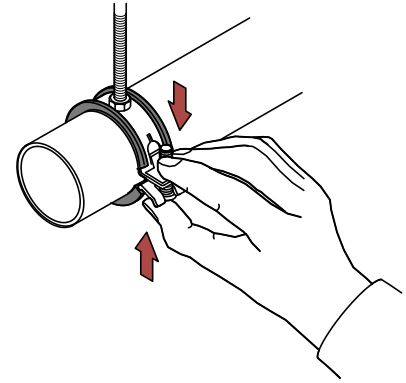

Features and benefits

- single screw clamp
- with BISMAT[®] Flash quick locking system
- clamp easy to close with one hand
- the locking screw can be secured without use of tools
- material: steel
- zinc plated
- noise insulating lining, EPDM rubber, black
- age resistant lining
- sound insulating lining according to DIN 4109
- tested for fire safety
- Plenum rated - tested to ASTM E-84

Part No.	D (mm)	IP (")	CT (")	G (")	B (")	H (")	h (")	b x s (mm)	cs	F _{a,z} (lbf)	Pack 1
CR3379018	15 - 18	$\frac{3}{8}$	$\frac{1}{2}$	$\frac{3}{8}$ "	1.9	1.4	0.87	20 x 1.25	M6	180	50
CR3379023	20 - 23	$\frac{1}{2}$	$\frac{3}{4}$	$\frac{3}{8}$ "	2.1	1.5	0.91	20 x 1.25	M6	180	50
CR3379028	25 - 28	$\frac{3}{4}$	1	$\frac{3}{8}$ "	2.3	1.7	1.00	20 x 1.25	M6	180	50
CR3379035	31 - 35	1	$1\frac{1}{4}$	$\frac{3}{8}$ "	2.6	2.0	1.20	20 x 1.25	M6	180	50
CR3379043	40 - 43	$1\frac{1}{4}$	$1\frac{1}{2}$	$\frac{3}{8}$ "	2.9	2.4	1.30	20 x 1.25	M6	180	50
CR3379051	48 - 51	$1\frac{1}{2}$	-	$\frac{3}{8}$ "	3.2	2.6	1.50	20 x 1.25	M6	180	50
CR3379056	53 - 56	-	2	$\frac{3}{8}$ "	3.3	3.0	1.60	20 x 1.25	M6	180	50
CR3379063	57 - 63	2	-	$\frac{3}{8}$ "	3.6	3.2	1.80	20 x 1.25	M6	180	50

The max. allowed load (F_{a,z}) is calculated using specific statistical methods related to the breaking load, taking into account a deflection of 1.5 mm or 2% of the maximum nominal clamp diameter.

