
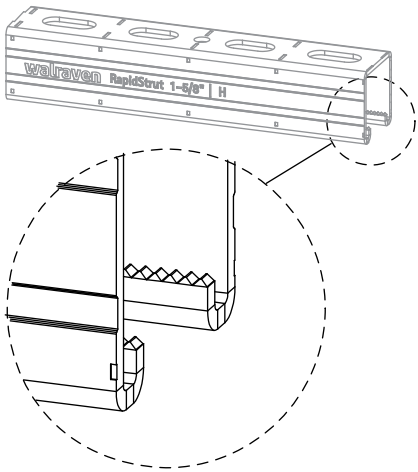


Walraven RapidStrut® Fixing Rail (pg)

(H 04 200)

suspension and support

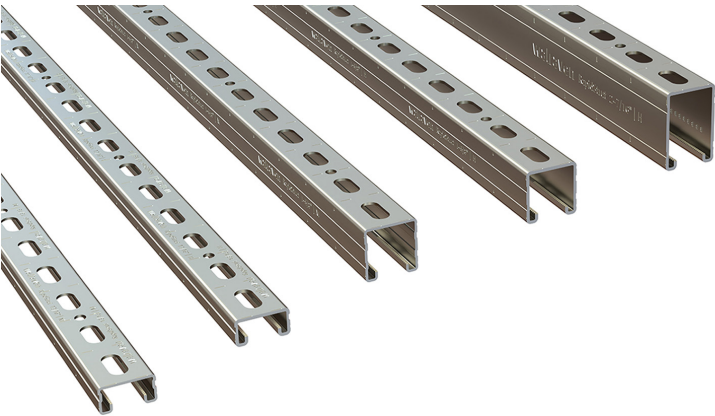


Features and benefits

- universal Strut System
- with continuous perforation
- distance between rail end and first hole is always equal
- continuous graduated 2 inch scale on both sides
- inward formed flanges with serrated profile for extra grip
- provided with fixing hole every 8 inches
- pre-galvanized

Part No.	Model	Type	L	B	H	s	S	BndS	BndL	App.
CR6505322	Half slot perforation	13/16   M	10 ft	1-5/8	13/16	14	7/8	10	50	ft.
CR6505622	Half slot perforation	13/16   M	20 ft	1-5/8	13/16	14	7/8	-	-	ft.
CR6505342	Half slot perforation	1-5/8   M	10 ft	1-5/8	1-5/8	14	7/8	10	50	pc.
CR6505345	Half slot perforation	1-5/8   H	10 ft	1-5/8	1-5/8	12	7/8	10	50	pc.

For more information about the max. allowed load ( $F_{o,z}$ ) please refer to the loading tables or our online datasheet 'Technical Details BIS RapidStrut®'.

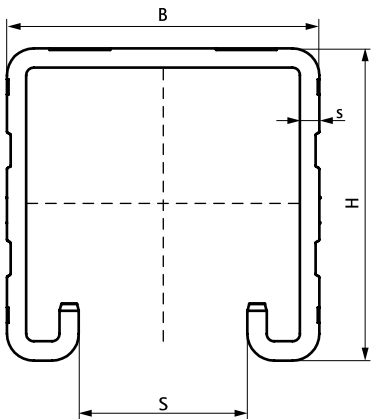

Complementary

BIS RapidStrut® Hammerfix G2 (BUP1000)  
BIS RapidStrut® Slide Nuts G2 (BUP1000)  
Walraven RapidStrut® Rail T- and X-Connector G2 (BUP1000)

Complementary

Walraven Yeti® 480 Support System  
Walraven Yeti® 335 Support System  
Walraven W1000 Strut Clamp