


BIS Strut Stainless Steel Beam Clamp

(M 62 16)

to connect Strut Rail to steel beam

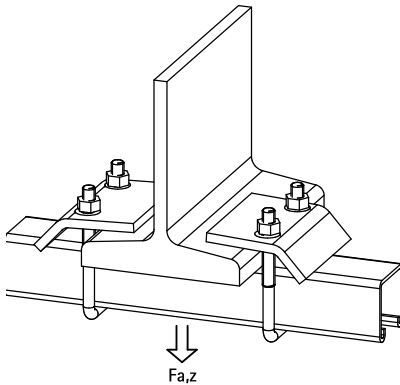

Features and benefits

- for a solid fixing under flanges without welding or drilling
- material: stainless steel 1.4401/1.4404 (A4) – EN 10088, AISI 316/316L
- always use 2 beam clamps per fixing

| Part No. | A<br>(mm) | G   | L     | B<br>(mm) | H<br>(mm) | s<br>(mm) | Lm1<br>(mm) | SW1<br>(mm) | For Rail     | F <sub>a,z</sub><br>(N) | F <sub>a,z</sub><br>(kg) | Pack 1 |
|----------|-----------|-----|-------|-----------|-----------|-----------|-------------|-------------|--------------|-------------------------|--------------------------|--------|
| 66587721 | 20.0      | M10 | 69 mm | 80        | 130       | 6.0       | 75          | 17          | Strut 41x41D | 5,700                   | 570                      | 25     |

