


Di Electric Union Model D

(N 05 335)

steel male thread to copper solder connection

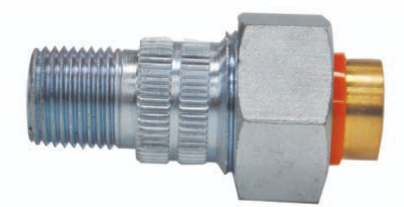

Features and benefits

- designed for installation of two non similar pipes to prevent corrosion and deterioration in piping systems due to galvanic and stray current
  - Construction Features
    - electrogalvanized threaded steel body with integral sweat end on one side with brass threaded/solder coupler
    - dielectric coupler sleeve and separator gasket to prevent metal to metal contact
    - lead free construction to comply with lead free installation requirements
- Technical Data
    - maximum pressure: 250 PSI / 17 bar
    - temperature resistance: from -30 °C to +120 °C
    - electrogalvanized as per ASTM B 633 Standards (SC3)
    - dielectric strength: ASTM D149, BS 2782, DIN 53483
    - threading: BS21 : 1985 (NPT available on request)

Part No.	D (")	Model
DMDEUD022	1/2	Steel MT 1/2" x Copper Solder 1/2" (16 mm)
DMDEUD028	3/4	Steel MT 3/4" x Copper Solder 3/4" (22 mm)
DMDEUD035	1	Steel MT 1" x Copper Solder 1" (28 mm)