


Insulation Protection Shield

(D 15 345)

48.2 - 812.8 mm

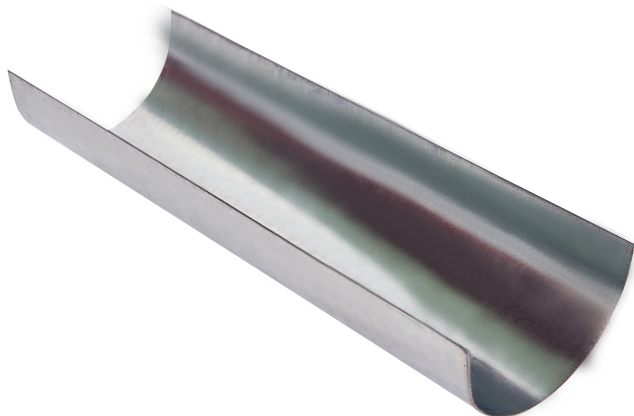

Features and benefits

- used between hanger surface and insulated pipes to prevent crushing of insulation
- material: steel
- electrogalvanized as per ASTM B 633 Standards (SC3)
- designed to meet MSS Standard SP-58-2002, type 40

Part No.	D (mm)	L (mm)	s (mm)	Gauge	Ø Matching Hanger (")	Ø Matching Hanger (mm)
DMIPS1A	48.2	305 mm	1.22	18	1½	40
DMIPS2A	60.4	305 mm	1.22	18	2	50
DMIPS3A	73.1	305 mm	1.22	18	2½	65
DMIPS4A	88.9	305 mm	1.22	18	3	80
DMIPS5A	101.6	305 mm	1.22	18	3½	90
DMIPS6A	114.3	305 mm	1.22	18	4	100
DMIPS7A	127.0	305 mm	1.22	18	5	125
DMIPS8A	141.2	305 mm	1.22	18	5	125
DMIPS9A	168.6	305 mm	1.22	16	6	150
DMIPS10A	194.0	305 mm	1.22	16	8	200
DMIPS11A	219.4	305 mm	1.22	16	8	200
DMIPS10B	194.0	457 mm	1.52	16	8	200
DMIPS11B	219.0	457 mm	1.52	16	8	200
DMIPS12B	244.8	457 mm	1.52	16	10	250
DMIPS13B	273.3	457 mm	1.52	16	10	250
DMIPS14C	298.7	610 mm	1.91	14	12	300
DMIPS15C	324.1	610 mm	1.91	14	12	300
DMIPS16C	355.6	610 mm	1.91	14	14	350
DMIPS17C	381.0	610 mm	1.91	14	16	400
DMIPS18C	406.4	610 mm	1.91	14	16	400
DMIPS19C	431.8	610 mm	1.91	14	18	450
DMIPS20C	457.2	610 mm	2.67	12	18	450
DMIPS21C	482.6	610 mm	2.67	12	20	500
DMIPS22C	508.0	610 mm	2.67	12	20	500
DMIPS23C	533.4	610 mm	2.67	12	24	600
DMIPS24C	558.8	610 mm	2.67	12	24	600
DMIPS25C	584.2	610 mm	2.67	12	24	600
DMIPS26C	609.6	610 mm	2.67	12	24	600
DMIPS27C	635.0	610 mm	2.67	12	30	750
DMIPS28C	660.4	610 mm	2.67	12	30	750
DMIPS29C	685.8	610 mm	2.67	12	30	750
DMIPS30C	711.2	610 mm	2.67	12	30	750
DMIPS31C	736.6	610 mm	2.67	12	30	750
DMIPS32C	662.0	610 mm	2.67	12	30	750
DMIPS33C	812.8	610 mm	2.67	12	36	900

Hot Dip Galvanized option available on request.

