

Walraven RapidStrut® Rail Connector – U-shaped G2

(H 28 89)

(BUP1000)


for all Structural fabrications



Features and benefits

- connector with pre-assembled BIS RapidStrut® Slide nut(s)
 - to make fabrication with Strut Rail
 - ready-to-use pre-assembled for a quick fixing, and retains assembly in place before final tightening
 - material: metal parts made of steel 1.0332; spring(s) made of POM (polyoxymethylene), green
- surface protection:
 - product is part of the Walraven BIS UltraProtect® 1000 system
 - suitable for in- and outdoor applications
 - stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227

Part No.	T _(inst.) (Nm)	For Rail	F _{a,x} (N)	M _{a,y} (Nm)	Pack 1
665885421	10.0	Strut	690	143.0	20

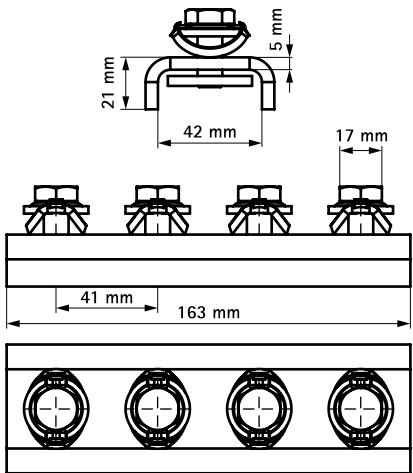

Complementary
Walraven RapidStrut® Channel DS 5
(BUP1000)

Alternative
Walraven RapidStrut® Rail Connector G2
(BUP1000)