

Walraven Strut Rubber Strip

noise insulation lining for Strut rail


(H 39 20)



Features and benefits

- noise insulating lining for rail
- also usable for threaded rod M6, M8 or M10
- chlorine free and resistant to ageing
- resistant to ozone, UV, weather and sea water
- shore A hardness 70 ±5
- building material class B2 according to DIN 4102-1 and class E according to EN 13501-1
- temperature resistance from -30 °C to +110 °C
- material: EPDM rubber, black
- sound insulating lining according to DIN 4109

| Part No. | R          | L     | For Rail | Pack 1 |
|----------|------------|-------|----------|--------|
| 6568041  | 1/4 - 1/2" | 30 m  | Strut    | 30     |
| 6568042  | 1/4 - 1/2" | 50 mm | Strut    | 50     |

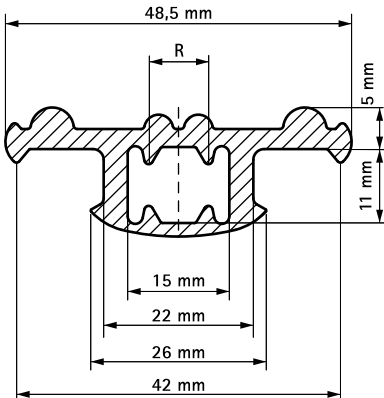

Complementary  
Walraven RapidStrut® Cantilever Arm (BUP1000)  
Walraven RapidStrut® Channel (pg)  
Walraven RapidStrut® Channel DS 5 (BUP1000)