


BIS Beam Clamp Model O


(K 20 15)

for flange up to 45 mm

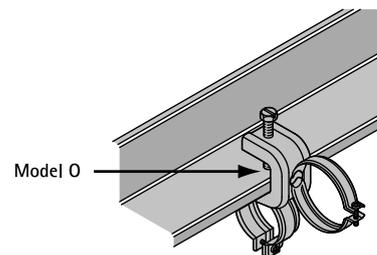


Features and Benefits

- for a solid fixing to steel construction without the need for welding or drilling
- up to flange thickness 45 mm
- with hole \varnothing 14 mm for fixing of BIS IC-clamp, stud bolt or S-Hook
- with serration for increased security
- material: steel
- surface treatment: Dacromet
- see also: IC-clamp (for conduit or cable); square nut (for threaded rod) or protective cap (to avoid damaging of protected surfaces)



Part No.	A (mm)	F _{a,z} (N)	Pack 1
6077020	≤20	1,100	25
6077030	≤30	1,200	25
6077045	≤45	1,300	25

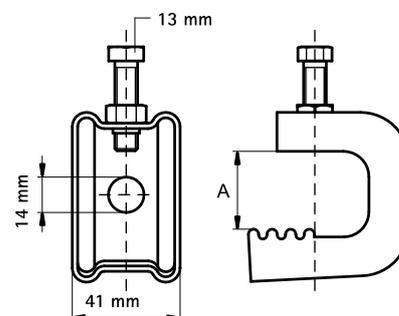

Complementary

Walraven Stud Bolt
BIS Beam Clamp Model O - Accessories