




BIS Swivel Beam Clamp Model E

(K 20 25)

for flange up to 24 mm

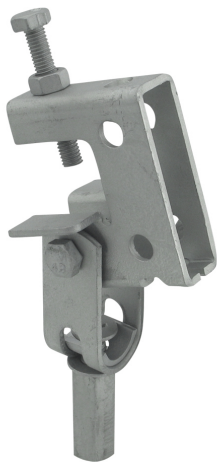

Features and Benefits

- multidirectional clamp
- for suspension of light components to pitched beams without welding or drilling
- up to flange thickness 24 mm
- articulation to 30° sideways, 45° forwards
- material: steel
- surface treatment: Dacromet

| Part No. | A<br>(mm) | G   | Pack 1 |
|----------|-----------|-----|--------|
| 6076000  | ≤24       | M10 | 10     |

