


# BISMAT<sup>®</sup> 2000

for metal pipes 57 - 219 mm

M8/10 - M10

(A 05 24)



## Features and Benefits

- two-screw clamp
- with BISMAT<sup>®</sup> quick locking system
- from Ø 159 mm: with quick locking system
- material: steel
- zinc plated
- noise insulating lining, EPDM rubber, black
- age resistant lining
- sound insulating lining according DIN 4109
- noise reduction according to ISO 3822-1 up to 23 dB(A)
- tested for fire safety


RAL-GZ 655/B  
Cert.Nr. 2010-22

RAL-GZ 656  
Cert.Nr. 2011-10a


1530-003-15


| Part No. | D<br>(mm) | D<br>(°) | DN  | G     | B<br>(mm) | H<br>(mm) | h<br>(mm) | b x s<br>(mm) | cs | F <sub>a,z</sub><br>(N) | RAL              | Pack 1 |
|----------|-----------|----------|-----|-------|-----------|-----------|-----------|---------------|----|-------------------------|------------------|--------|
| 3403064  | 57 - 64   | 2        | 50  | M8/10 | 107       | 90        | 52        | 23 x 2.00     | M6 | 520                     | RAL <sup>2</sup> | 50     |
| 3403070  | 64 - 70   | -        | -   | M8/10 | 115       | 99        | 56        | 23 x 2.00     | M6 | 520                     | RAL <sup>2</sup> | 50     |
| 3403080  | 73 - 80   | 2½       | 65  | M8/10 | 126       | 109       | 61        | 23 x 2.00     | M6 | 520                     | RAL <sup>2</sup> | 50     |
| 3403091  | 83 - 91   | 3        | 80  | M8/10 | 137       | 121       | 67        | 25 x 2.50     | M6 | 935                     | RAL <sup>2</sup> | 25     |
| 3403105  | 100 - 105 | -        | -   | M8/10 | 152       | 135       | 74        | 25 x 2.50     | M6 | 935                     | RAL <sup>2</sup> | 25     |
| 3403114  | 108 - 114 | 4        | 100 | M8/10 | 160       | 144       | 79        | 25 x 2.50     | M6 | 935                     | RAL <sup>2</sup> | 25     |
| 3403119  | 116 - 119 | -        | -   | M8/10 | 165       | 149       | 81        | 25 x 2.50     | M6 | 935                     | RAL <sup>1</sup> | 25     |
| 3403125  | 122 - 125 | -        | -   | M8/10 | 173       | 157       | 85        | 25 x 2.50     | M6 | 935                     | RAL <sup>1</sup> | 25     |
| 3403141  | 133 - 141 | 5        | 125 | M8/10 | 189       | 170       | 92        | 25 x 2.50     | M6 | 935                     | RAL <sup>1</sup> | 25     |
| 3423168  | 159 - 168 | 6        | 150 | M10   | 233       | 198       | 102       | 25 x 3.00     | M8 | 1,220                   | -                | 10     |
| 3423210  | 200 - 210 | -        | -   | M10   | 273       | 239       | 122       | 25 x 3.00     | M8 | 1,220                   | -                | 10     |
| 3423219  | 210 - 219 | 8        | 200 | M10   | 284       | 250       | 128       | 25 x 3.00     | M8 | 1,220                   | -                | 10     |

RAL<sup>1</sup> = tested, certified and monitored by a third party according to RAL-GZ 655/B.

RAL<sup>2</sup> = tested, certified and monitored by a third party according to RAL-GZ 655/B and RAL-GZ 656.

From Ø 159 mm: with quick locking system.

For detailed technical information about our RAL marked products, please see the RAL datasheet in our web catalogue.

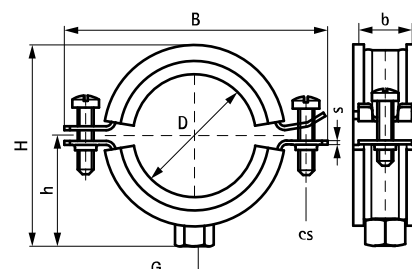

## Complementary

Walraven RapidRail<sup>®</sup> Fixing System  
Walraven Fixing Accessories  
Walraven Fastenings