


BISOFIX[®] E13 + 2S

for insulated pipes 8.0 - 168.3 mm

(D 03 04)

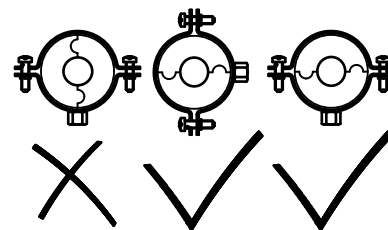

Features and Benefits

- for combination with elastomeric foam insulation
- vapourproof glueable with pipe insulation
- insulating pipe support with 2S clamp
- 2S clamp with M8/M10 connection nut
- does not contain CFC, HCFC, formaldehyde or cadmium
- fire class B2
- PIR density for D <80mm = 80kg/m³
- PIR density for D >80mm = 120kg/m³
- zinc plated
- temperature range -45 °C - +105 °C

Part No.	D (mm)	Model	F _{a,z} (N)	Pack 1
I133303008	8.0	BISOFIX [®] E13 + 2S Clamp	100	50
I133303010	10.2	BISOFIX [®] E13 + 2S Clamp	100	50
I133303012	12.0	BISOFIX [®] E13 + 2S Clamp	100	50
I133303015	15.0	BISOFIX [®] E13 + 2S Clamp	100	50
I133303018	17.2 - 18.0	BISOFIX [®] E13 + 2S Clamp	100	50
I133303022	21.3 - 22.0	BISOFIX [®] E13 + 2S Clamp	100	50
I133303028	26.9 - 28.0	BISOFIX [®] E13 + 2S Clamp	100	50
I133303035	33.7 - 35.0	BISOFIX [®] E13 + 2S Clamp	100	50
I133303042	42.4	BISOFIX [®] E13 + 2S Clamp	150	50
I133303048	48.3	BISOFIX [®] E13 + 2S Clamp	225	50
I133303054	54.0	BISOFIX [®] E13 + 2S Clamp	225	50
I133303057	57.0	BISOFIX [®] E13 + 2S Clamp	350	50
I133303060	60.3	BISOFIX [®] E13 + 2S Clamp	350	50
I133303064	64.0	BISOFIX [®] E13 + 2S Clamp	350	50
I133303070	70.0	BISOFIX [®] E13 + 2S Clamp	425	50
I133303076	76.1	BISOFIX [®] E13 + 2S Clamp	575	25
I133303089	88.9	BISOFIX [®] E13 + 2S Clamp	875	25
I133303102	101.6	BISOFIX [®] E13 + 2S Clamp	1,000	25
I133303108	108.0	BISOFIX [®] E13 + 2S Clamp	1,075	25
I133303114	114.3	BISOFIX [®] E13 + 2S Clamp	1,250	25
I133303133	133.0	BISOFIX [®] E13 + 2S Clamp	1,475	25
I133303140	139.7	BISOFIX [®] E13 + 2S Clamp	1,700	5
I133303160	159.0 - 160.0	BISOFIX [®] E13 + 2S Clamp	1,950	5
I133303168	168.3	BISOFIX [®] E13 + 2S Clamp	2,125	5