


# BISOFIX® E13 + Bifix® G2

for insulated pipes 8.0 - 168.3 mm

(D 03 06)

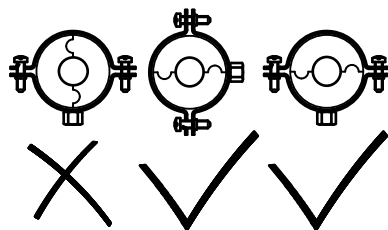

## Features and Benefits

- for combination with elastomeric foam insulation
- vapourproof glueable with pipe insulation
- insulating pipe support with Bifix® G2 clamp
- Bifix® G2 with M8/M10 connection nut
- does not contain CFC, HCFC, formaldehyde or cadmium
- fire class B2
- PIR density for D <80mm = 80kg/m³
- PIR density for D >80mm = 120kg/m³
- surface protection:
  - product is part of the Walraven BIS UltraProtect® 1000 system
  - suitable for in- and outdoor applications
  - stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- temperature range -45 °C - +105 °C

| Part No.   | Consists Of          | D<br>(mm)     | Model                          | F <sub>a,z</sub><br>(N) | Pack 1 |
|------------|----------------------|---------------|--------------------------------|-------------------------|--------|
| I133008008 | I130000008 + 3008039 | 8.0           | BISOFIX® E13 + Bifix® G2 Clamp | 100                     | 50     |
| I133008010 | I130000010 + 3008039 | 10.2          | BISOFIX® E13 + Bifix® G2 Clamp | 100                     | 50     |
| I133008012 | I130000012 + 3008039 | 12.0          | BISOFIX® E13 + Bifix® G2 Clamp | 100                     | 50     |
| I133008015 | I130000015 + 3008045 | 15.0          | BISOFIX® E13 + Bifix® G2 Clamp | 100                     | 50     |
| I133008018 | I130000018 + 3008045 | 17.2 - 18.0   | BISOFIX® E13 + Bifix® G2 Clamp | 100                     | 50     |
| I133008022 | I130000022 + 3008052 | 21.3 - 22.0   | BISOFIX® E13 + Bifix® G2 Clamp | 100                     | 50     |
| I133008028 | I130000028 + 3008058 | 26.9 - 28.0   | BISOFIX® E13 + Bifix® G2 Clamp | 100                     | 50     |
| I133008035 | I130000035 + 3008064 | 33.7 - 35.0   | BISOFIX® E13 + Bifix® G2 Clamp | 100                     | 50     |
| I133008042 | I130000042 + 3008070 | 42.4          | BISOFIX® E13 + Bifix® G2 Clamp | 150                     | 50     |
| I133008048 | I130000048 + 3008079 | 48.3          | BISOFIX® E13 + Bifix® G2 Clamp | 225                     | 50     |
| I133008054 | I130000054 + 3008083 | 54.0          | BISOFIX® E13 + Bifix® G2 Clamp | 225                     | 50     |
| I133008057 | I130000057 + 3008083 | 57.0          | BISOFIX® E13 + Bifix® G2 Clamp | 350                     | 50     |
| I133008060 | I130000060 + 3008091 | 60.3          | BISOFIX® E13 + Bifix® G2 Clamp | 350                     | 50     |
| I133008064 | I130000064 + 3008105 | 64.0          | BISOFIX® E13 + Bifix® G2 Clamp | 350                     | 50     |
| I133008070 | I130000070 + 3008105 | 70.0          | BISOFIX® E13 + Bifix® G2 Clamp | 425                     | 50     |
| I133008076 | I130000076 + 3008115 | 76.1          | BISOFIX® E13 + Bifix® G2 Clamp | 575                     | 25     |
| I133008089 | I130000089 + 3008130 | 88.9          | BISOFIX® E13 + Bifix® G2 Clamp | 875                     | 25     |
| I133008102 | I130000102 + 3008140 | 101.6         | BISOFIX® E13 + Bifix® G2 Clamp | 1,000                   | 25     |
| I133008108 | I130000108 + 3008140 | 108.0         | BISOFIX® E13 + Bifix® G2 Clamp | 1,075                   | 25     |
| I133008114 | I130000114 + 3008160 | 114.3         | BISOFIX® E13 + Bifix® G2 Clamp | 1,250                   | 25     |
| I133008133 | I130000133 + 3008169 | 133.0         | BISOFIX® E13 + Bifix® G2 Clamp | 1,475                   | 25     |
| I133008140 | I130000140 + 3008180 | 139.7         | BISOFIX® E13 + Bifix® G2 Clamp | 1,700                   | 5      |
| I133008160 | I130000160 + 3008200 | 159.0 - 160.0 | BISOFIX® E13 + Bifix® G2 Clamp | 1,950                   | 5      |
| I133008168 | I130000168 + 3008200 | 168.3         | BISOFIX® E13 + Bifix® G2 Clamp | 2,125                   | 5      |