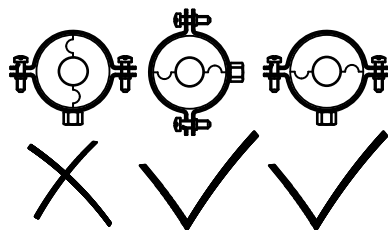


BISOFIX® E19 + Bifix® G2

(D 03 18)

for insulated pipes 12.0 - 168.3 mm

**Features and Benefits**

- for combination with elastomeric foam insulation
- vapourproof glueable with pipe insulation
- insulating pipe support with Bifix® G2 clamp
- Bifix® G2 with M8/M10 connection nut
- does not contain CFC, HCFC, formaldehyde or cadmium
- fire class B2
- PIR density for D <80mm = 80kg/m³
- PIR density for D >80mm = 120kg/m³
- surface protection:
 - product is part of the Walraven BIS UltraProtect® 1000 system
 - suitable for in- and outdoor applications
 - stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- temperature range -45 °C - +105 °C

Part No.	Consists Of	D (mm)	Model	F _{a,z} (N)	Pack 1
I193008012	I190000012 + 3008052	12.0	BISOFIX® E19 + Bifix® G2 Clamp	100	50
I193008015	I190000015 + 3008058	15.0	BISOFIX® E19 + Bifix® G2 Clamp	100	50
I193008018	I190000018 + 3008058	17.2 - 18.0	BISOFIX® E19 + Bifix® G2 Clamp	100	50
I193008022	I190000022 + 3008064	21.3 - 22.0	BISOFIX® E19 + Bifix® G2 Clamp	100	50
I193008028	I190000028 + 3008070	26.9 - 28.0	BISOFIX® E19 + Bifix® G2 Clamp	100	50
I193008035	I190000035 + 3008079	33.7 - 35.0	BISOFIX® E19 + Bifix® G2 Clamp	100	50
I193008042	I190000042 + 3008083	42.4	BISOFIX® E19 + Bifix® G2 Clamp	150	50
I193008048	I190000048 + 3008091	48.3	BISOFIX® E19 + Bifix® G2 Clamp	225	50
I193008054	I190000054 + 3008105	54.0	BISOFIX® E19 + Bifix® G2 Clamp	225	50
I193008057	I190000057 + 3008105	57.0	BISOFIX® E19 + Bifix® G2 Clamp	225	50
I193008060	I190000060 + 3008105	60.3	BISOFIX® E19 + Bifix® G2 Clamp	350	50
I193008064	I190000064 + 3008115	64.0	BISOFIX® E19 + Bifix® G2 Clamp	350	25
I193008070	I190000070 + 3008130	70.0	BISOFIX® E19 + Bifix® G2 Clamp	425	25
I193008076	I190000076 + 3008130	76.1	BISOFIX® E19 + Bifix® G2 Clamp	575	25
I193008089	I190000089 + 3008140	88.9	BISOFIX® E19 + Bifix® G2 Clamp	875	25
I193008102	I190000102 + 3008160	101.6	BISOFIX® E19 + Bifix® G2 Clamp	1,000	25
I193008108	I190000108 + 3008160	108.0	BISOFIX® E19 + Bifix® G2 Clamp	1,075	25
I193008114	I190000114 + 3008169	114.3	BISOFIX® E19 + Bifix® G2 Clamp	1,250	25
I193008133	I190000133 + 3008200	133.0	BISOFIX® E19 + Bifix® G2 Clamp	1,475	5
I193008140	I190000140 + 3008200	139.7	BISOFIX® E19 + Bifix® G2 Clamp	1,700	5
I193008160	I190000160 + 3008210	159.0 - 160.0	BISOFIX® E19 + Bifix® G2 Clamp	1,950	5
I193008168	I190000168 + 3008225	168.3	BISOFIX® E19 + Bifix® G2 Clamp	2,125	5