


BISOFIX[®] PIR50


for insulated pipes 12.0 - 406.4 mm

(D 03 80)

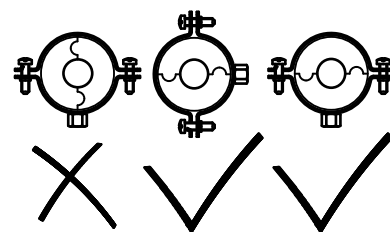

Features and Benefits

- for combination with rigid foam insulation
- cover joints with aluminium tape
- does not contain CFC, HCFC, formaldehyde or cadmium
- fire class B2
- PIR density for $D < 110\text{mm} = 80\text{kg/m}^3$
- PIR density for $D > 110\text{mm} = 120\text{kg/m}^3$
- thermal conductivity λ (approx. value): 0.30 W/(mK)
- temperature range $-45\text{ }^\circ\text{C} - +105\text{ }^\circ\text{C}$

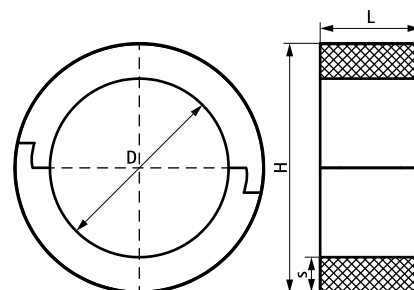

Complementary

Bifix[®] G2 (M8/10) (BUP1000)
2S Clamp (M8/10)
Walraven Heavy Duty Clamp HD500


Complementary

Walraven Heavy Duty Clamp HD500
(BUP1000)


BISOFIX® PIR50

for insulated pipes 12.0 - 406.4 mm

(D 03 80)

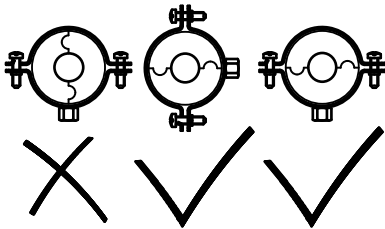

1500000406	406.4	-	-	150 mm	506.4	50.0	6,410	2
------------	-------	---	---	--------	-------	------	-------	---

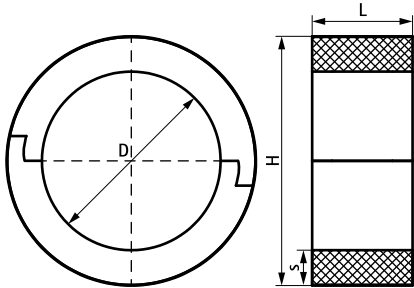

Complementary
Bifix® G2 (M8/10) (BUP1000)
2S Clamp (M8/10)
Walraven Heavy Duty Clamp HD500

Complementary
Walraven Heavy Duty Clamp HD500
(BUP1000)