
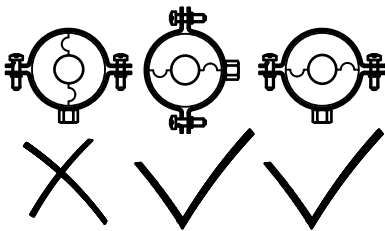


BISOFIX® PIR60 + HD500

(D 03 94)

for insulated pipes 108.0 - 168.3 mm

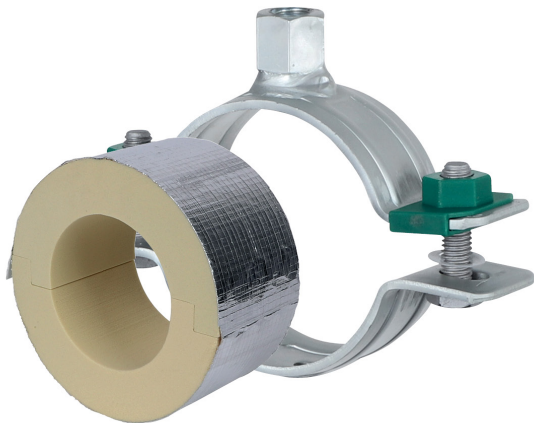

Features and Benefits

- for combination with rigid foam insulation
- cover joints with aluminium tape
- insulating pipe support with HD500 clamp
- HD500 clamp with M8/M10 and M10/M12 connection nut
- fire class B2
- PIR density for D <110mm = 80kg/m³
- PIR density for D >110mm = 120kg/m³
- thermal conductivity lambda (approx. value): 0.30 W/(mK)
- surface protection:
 - product is part of the Walraven BIS UltraProtect® 1000 system
 - suitable for in- and outdoor applications
 - stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- temperature range -45 °C - +105 °C

Part No.	Consists Of	D (mm)	Model	F _{a,z} (N)	Pack 1
I603306108	I600000108 + 33068227	108.0	BISOFIX® PIR60 + HD500 Clamp	800	5
I603306114	I600000114 + 33068241	114.3	BISOFIX® PIR60 + HD500 Clamp	1,790	5
I603306133	I600000133 + 33068254	133.0	BISOFIX® PIR60 + HD500 Clamp	2,190	4
I603306140	I600000140 + 33068264	139.7	BISOFIX® PIR60 + HD500 Clamp	2,280	4
I603306159	I600000159 + 33068279	159.0	BISOFIX® PIR60 + HD500 Clamp	2,450	4
I603306168	I600000168 + 33068289	168.3	BISOFIX® PIR60 + HD500 Clamp	2,620	4