


BISOFIX® PIR80

for insulated pipes 88.9 - 120.0 mm

(D 03 96)

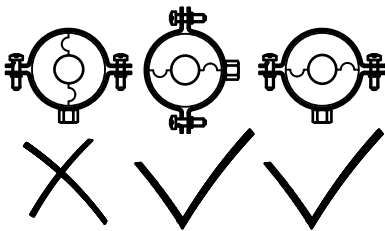

Features and Benefits

- for combination with rigid foam insulation
- cover joints with aluminium tape
- does not contain CFC, HCFC, formaldehyde or cadmium
- fire class B2
- PIR density for D <110mm = 80kg/m³
- PIR density for D >110mm = 120kg/m³
- thermal conductivity lambda (approx. value): 0.30 W/(mK)
- temperature range -45 °C - +105 °C

Part No.	D (mm)	D (")	DN	L	H (mm)	s (mm)	F _{a,z} (N)	Pack 1
I800000089	88.9	3	80	75 mm	249.0	80.0	800	5
I800000100	100.0	-	-	75 mm	260.0	80.0	820	5
I800000114	114.3	4	100	75 mm	274.0	80.0	1,860	5
I800000120	120.0	-	-	75 mm	280.0	80.0	2,150	5

