


Pacifyre® MK II Fire Sleeve (M) – Medium

for penetrations of metal pipes (insulated or non-insulated) 114 - 170 mm

(U 04 11)

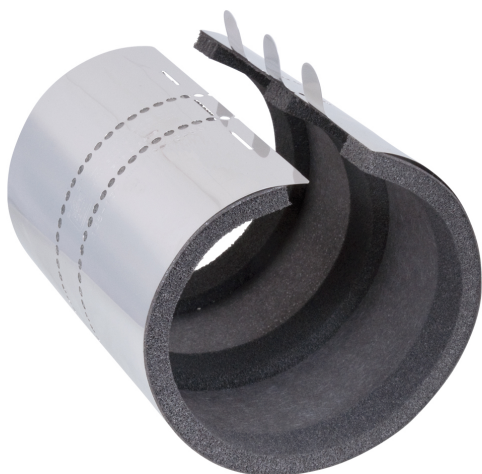


Features and Benefits

- for pipe penetrations of insulated or non-insulated metal pipes in accordance with e.g. BS476-20, in walls (solid walls or light partition walls) and ceilings with fire protection requirements
- the sleeve provides a guaranteed protection against fire, smoke and noise
- expansion and contraction of the pipe remains possible
- minimum space required, therefore can be applied in areas of hard accessibility
- a higher flexibility due to minimal overhang on wall and ceiling seals
- no tools, drilling or extra fixing materials needed
- simple and easy to install
- maintenance free
- noise reduction test report from IRB (Fraunhofer Institut - Germany) available



Part No.	D (mm)	D (")	DN	d (mm)	Pack 1	Pack 2
2141114116	114 - 116	4	100	138	1	6
2141138140	138 - 140	5	125	162	1	-
2141168170	168 - 170	6	150	192	1	-

For Pacifyre® MK II Fire Sleeves in other sizes, please contact your Walraven Sales Company.

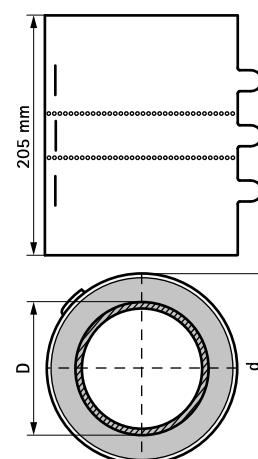

Complementary

Tangit FP 550 2C Fire Protection Foam
Tangit FP 800 Fire Protection Coating
Pacifyre® FPM

Complementary

Pacifyre® ID-Card