

WHA1H Highload Anchor


(L 03 54)

ultimate performance anchor for cracked concrete and seismic conditions



Features and Benefits

- very high load capacity
- ETA Option 1 approval for cracked and non-cracked concrete
- fire resistance class R30-R120 for design of anchorages under exposure to fire
- seismic performance categories C1 and C2 for design of anchorages under seismic action
- material: steel
- zinc plated
- substrate type:
 - cracked concrete
 - non-cracked concrete

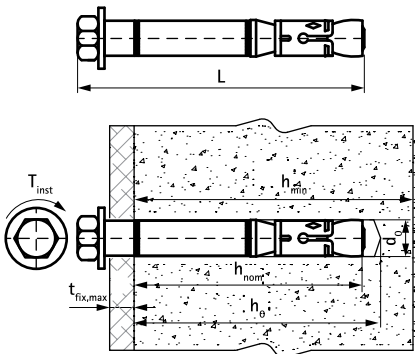

Part No.	Code	Size	L	d ₀	h ₀	h _{min}	h _{nom}	t _{fix,max}	Rec. Tension Load C20/25 Uncracked Concrete (kN)	Rec. Tension Load C20/25 Cracked Concrete (kN)	Pack 1
609832150	WHA1H 15x110	M10	110 mm	15 (mm)	95 (mm)	140 (mm)	85 (mm)	15 (mm)	14.29*	7.62*	25
609832151	WHA1H 15x136	M10	136 mm	15 (mm)	95 (mm)	140 (mm)	85 (mm)	45 (mm)	14.29	7.62*	25
609832180	WHA1H 18x117	M12	117 mm	18 (mm)	105 (mm)	160 (mm)	95 (mm)	10 (mm)	17.20*	12.26*	20

** Recommended loads: are stated for single anchors; apply to anchors correctly installed at maximum embedment depth; include partial safety factor and an overall partial safety factor for action of 1.4.*

The partial safety factor for action depends on the type of loading and shall be taken from national regulations. All anchor failure modes and the entire relevant product European Technical Assessment must be considered for anchor design.

For more information, please refer to the ETA report.

Complementary

WIS Brush
WIS Blow Pump
WDI1 SD Stop Drill Bit

Complementary

WSDS+ 3CE Concrete Drill Bit