

Walraven VibraTek® SA-3 Silent Absorber

(L2 05 54)

silent rubber absorber for isolating metal to metal contact




2801100300



2801100450

Features and Benefits

- formed of two rubber parts which fit into each other, making it is suitable for various fixing plate thicknesses
- ideal isolation of HVAC equipment
- for use with M8 threaded rods
- working temperature range -20 °C till 90 °C
- a versatile viscoelastic two-piece rubber absorber for preventing metal-to-metal contact in joined or fastened surfaces
- simple installation
- prevents transmission of vibration and noise

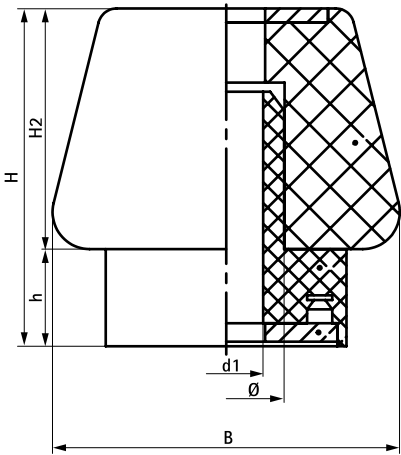

Part No.	B	H	h	H2	d1	Ø	Colour	Min. Load	Max. Load	Min. Optimal Load	Max. Optimal Load	Max. Deflection	Pack 1
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		(N)	(N)	(N)	(N)	(mm)	
2801100300	37.5	36.5	10.5	26	Ø 8	12.5	Grey + green	5	300	5	200	7.0	150
2801100450	37.5	36.5	10.5	26	Ø 8	12.5	Black + green	10	450	10	400	7.0	150