

BIS Expansion Device

fixing with sliding assemblies


(E 10 22)




666 3 410



666 3 412



666 3 416




666 3 210

Features and Benefits


- single and double brackets for pipe extensions
- fix directly on the building structure or in combination with rail systems
- suitable for ceiling mounting (suspended) and floor mounting (standing mounted)
- a variety of connection possibilities, can be combined with all pipe clamps
- material: metal parts made of steel; plastic parts made of POM (polyoxymethylene) / PPS (polyamphenylensulfid)
- friction coefficient $\mu = 0.18$; Sliding friction coefficient $\mu = 0.14$
- zinc plated
- temperature resistance up to $+120\text{ }^{\circ}\text{C}$
- Part No. 6663416: temperature resistance up to $+240\text{ }^{\circ}\text{C}$

Part No.	Model	G	B (mm)	H (mm)	d1 (mm)	k (mm)	SL (max.) (mm)	F _{a,z} (N)	F _{a,z 2} (N)	Pack 1
6663410	Single	M8/10	37	29	8.4	-	42	700	700	50
6663412	Single	M10/12	150	46	20 x 12.5	100	80	2,300	2,300	10
6663416	Single	M12/16	188	57	20 x 12.5	157	120	5,000	9,000	10
6663210	Double	M10/12	150	46	20 x 12.5	100	140	2,300	2,300	10


F_{a,z} = standing mounted; F_{a,z 2} = suspended.

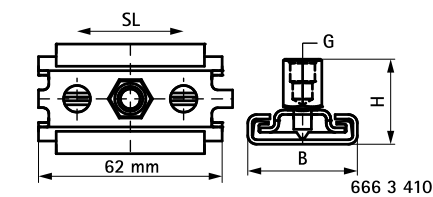


666 3 410

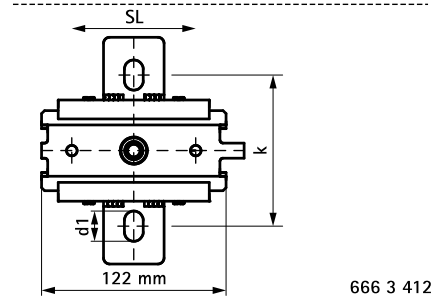


666 3 412

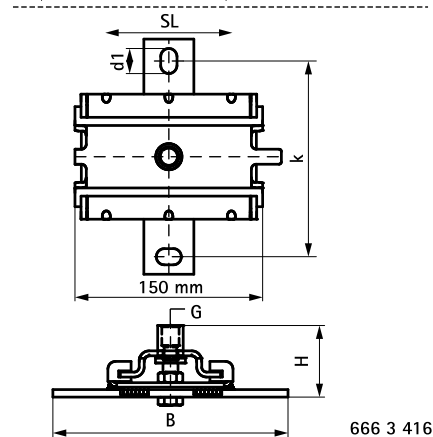

666 3 416

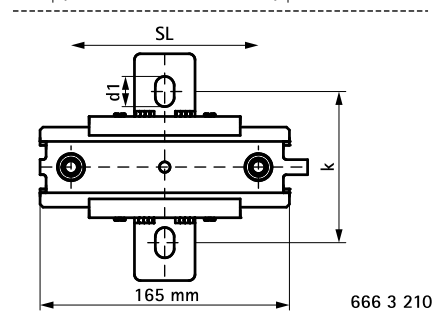

666 3 210

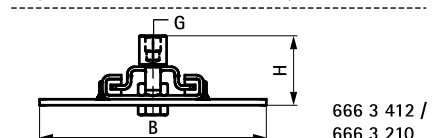
666 3 412 /
666 3 210

Complementary

Walraven Stud Bolt
Walraven Threaded Rod
WDI1 Drop-in Anchor

Complementary

WTB1 Throughbolt Anchor

Alternative

BIS Expansion Device (BUP1000)
BIS Expansion Guide Assembly (BUP1000)