


BIS Twistfix

14 - 72 mm


(J 58 10)

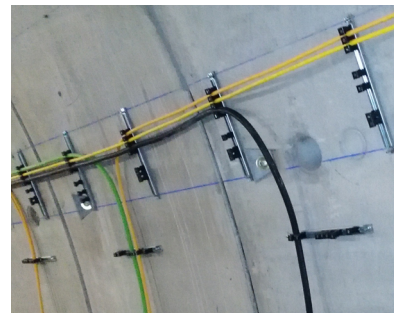

Features and Benefits

- space saving
- allows fixing of different diameters with the same clip
- for electrical and optical fiber systems
- material: PA (polyamide), black
- halogen free
- UV resistant
- Part No. 658420X: Flamability rating: class UL 94 HB
- temperature resistance from -18 °C to +66 °C

Part No.	D (mm)	For Rail	Pack 1
6584202	14 - 48	27x18, 30x15, 30x20, 28x30, 30x30	100
6584203	14 - 48	35x18	100
6584204	24 - 72	27x18, 30x15, 30x20, 28x30, 30x30	50
6584205	24 - 72	35x18	50

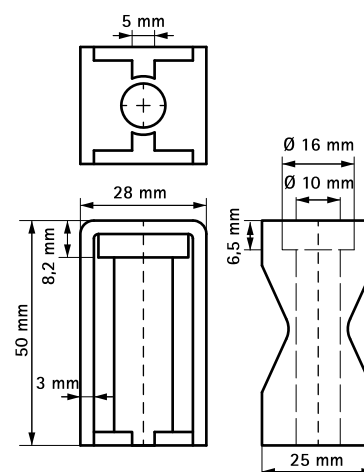

Complementary

BIS Fixing Rail for BIS Twistfix
Walraven RapidRail® Fixing Rail