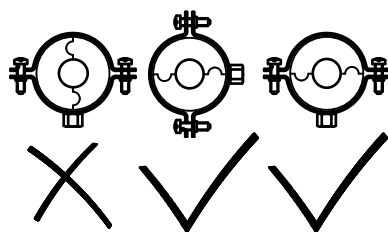


BISOFIX® E19 + HD500

for insulated pipes 76.1 - 219.1 mm

(D 03 20)

**Features and Benefits**

- for combination with elastomeric foam insulation
- vapourproof glueable with pipe insulation
- insulating pipe support with HD500 clamp
- HD500 clamp with M8/M10 and M10/M12 connection nut
- does not contain CFC, HCFC, formaldehyde or cadmium
- fire class B2
- PIR density for D <80mm = 80kg/m³
- PIR density for D >80mm = 120kg/m³
- surface protection:
 - product is part of the Walraven BIS UltraProtect® 1000 system
 - suitable for in- and outdoor applications
 - stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- temperature range -45 °C - +105 °C

Part No.	D (mm)	Model	F _{a,z} (N)	Pack 1
I193304076	76.1	BISOFIX® E19 + HD500 Clamp	575	25
I193304089	88.9	BISOFIX® E19 + HD500 Clamp	875	25
I193304102	101.6	BISOFIX® E19 + HD500 Clamp	1,000	15
I193304108	108.0	BISOFIX® E19 + HD500 Clamp	1,075	15
I193304114	114.3	BISOFIX® E19 + HD500 Clamp	1,250	15
I193304133	133.0	BISOFIX® E19 + HD500 Clamp	1,475	5
I193304140	139.7	BISOFIX® E19 + HD500 Clamp	1,700	5
I193304160	159.0 - 160.0	BISOFIX® E19 + HD500 Clamp	1,950	5
I193304168	168.3	BISOFIX® E19 + HD500 Clamp	2,125	5
I193304219	219.1	BISOFIX® E19 + HD500 Clamp	3,525	2