
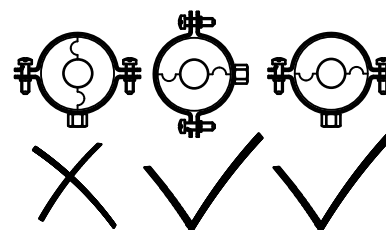


BISOFIX[®] PIR50 + 2S

for insulated pipes 12.0 - 114.3 mm

(D 03 82)

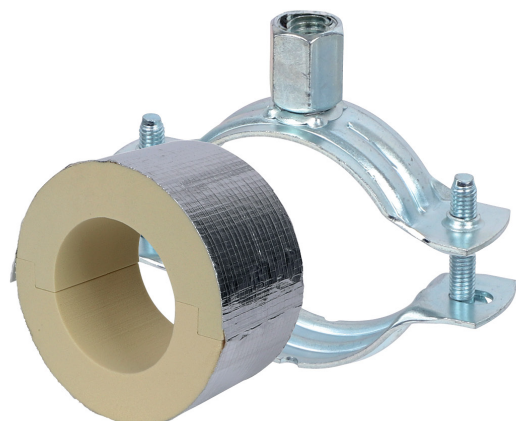

Features and Benefits

- for combination with rigid foam insulation
- cover joints with aluminium tape
- insulating pipe support with 2S clamp
- 2S clamp with M8/M10 connection nut
- does not contain CFC, HCFC, formaldehyde or cadmium
- fire class B2
- PIR density for $D < 110\text{mm}$ = 80kg/m^3
- PIR density for $D > 110\text{mm}$ = 120kg/m^3
- thermal conductivity λ (approx. value): 0.30 W/(mK)
- clamp: zinc plated
- temperature range $-45\text{ }^\circ\text{C}$ - $+105\text{ }^\circ\text{C}$

Part No.	D (mm)	Model	F _{a,z} (N)	Pack 1
I503303012	12.0	BISOFIX [®] PIR50 + 2S Clamp	220	25
I503303015	15.0 - 16.0	BISOFIX [®] PIR50 + 2S Clamp	250	25
I503303018	17.2 - 18.0	BISOFIX [®] PIR50 + 2S Clamp	300	25
I503303022	21.3 - 22.0	BISOFIX [®] PIR50 + 2S Clamp	340	25
I503303028	26.9 - 28.0	BISOFIX [®] PIR50 + 2S Clamp	350	25
I503303034	33.7 - 35.0	BISOFIX [®] PIR50 + 2S Clamp	370	25
I503303042	42.4	BISOFIX [®] PIR50 + 2S Clamp	470	25
I503303048	48.3	BISOFIX [®] PIR50 + 2S Clamp	500	15
I503303054	54.0	BISOFIX [®] PIR50 + 2S Clamp	520	15
I503303057	56.0 - 57.0	BISOFIX [®] PIR50 + 2S Clamp	520	15
I503303060	60.3	BISOFIX [®] PIR50 + 2S Clamp	540	15
I503303064	64.0	BISOFIX [®] PIR50 + 2S Clamp	550	15
I503303070	70.0	BISOFIX [®] PIR50 + 2S Clamp	600	15
I503303076	76.1	BISOFIX [®] PIR50 + 2S Clamp	650	15
I503303089	88.9	BISOFIX [®] PIR50 + 2S Clamp	690	15
I503303102	101.6	BISOFIX [®] PIR50 + 2S Clamp	720	5
I503303108	108.0	BISOFIX [®] PIR50 + 2S Clamp	760	5
I503303114	114.3	BISOFIX [®] PIR50 + 2S Clamp	1,680	5