


# Britclips® Tiger

for flange 2 - 24 mm

(J 05 05)

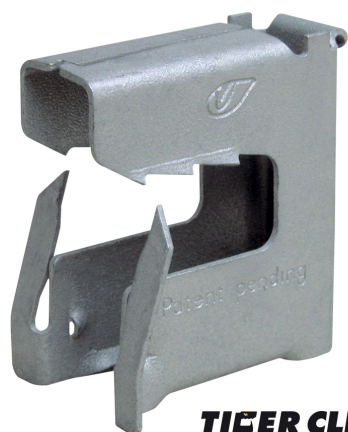

incl. ICP

**TIGER CLIP®**



## Features and Benefits

- multi-purpose clip
- for static loads, single use and non relocatable
- to hammer on or by hand; always the eye opposite to the load
- also suitable for outside use
- with hole to receive steel cable, S-Hook, cable tie, threaded rod (M6 or M8), etc.
- material: spring steel (type C67S according to EN10132)
- surface treatment: Magni coated, 2 layers (600 hours resistant to salt spray)
- incl. Britclips® ICP Thread plate, for wood screws from 4.0 to 4.5 mm (see J 50 07)

**CSTB**  
le futur en construction


Report ED 05 / 022

| Part No. | Code      | A<br>(mm) | B<br>(mm) | H<br>(mm) | d1<br>(mm) | d2<br>(mm) | F <sub>a,z</sub><br>(N) | CSTB | Pack 1 | Pack 2 |
|----------|-----------|-----------|-----------|-----------|------------|------------|-------------------------|------|--------|--------|
| 51803208 | Tiger 8R  | 2 - 8     | 30        | 30        | 8.0        | 6.6        | 1,200                   | CSTB | 25     | 250    |
| 51805208 | Tiger 8   | 2 - 8     | 30        | 30        | 8.0        | 6.6        | 1,200                   | CSTB | 100    | 500    |
| 51803216 | Tiger 16R | 8 - 16    | 32        | 38        | 8.0        | 6.6        | 1,200                   | CSTB | 25     | 250    |
| 51805216 | Tiger 16  | 8 - 16    | 32        | 38        | 8.0        | 6.6        | 1,200                   | CSTB | 100    | 500    |
| 51804224 | Tiger 24  | 16 - 24   | 42        | 48        | 8.0        | 6.6        | 1,200                   | CSTB | 50     | 250    |

For use with static loads only.

Max. allowed load (F<sub>a,z</sub>) with M6 or M8 threaded rod vertical (safety margin 1:4).

Externally tested by CSTB.

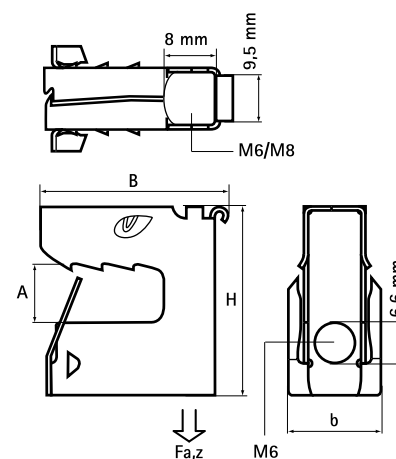

## Complementary

Walraven Stud Bolt  
BIS Cable Tie  
BIS S-Hook

## Complementary

Walraven Threaded Rod  
BIS Chain (DIN 5685)