

Walraven RapidRail® Fixing Rail

for light fixing applications

(G 04 06)




Features and Benefits

- C-profile
- for quick and adjustable fixing of one or multiple pipes
- with continuous perforation
- distance between rail end and first hole is always equal
- with sawing marks each 50 mm
- flexible hole pattern with anchor holes and also small holes to use wood screws
- unique hole pattern at rails 30x20, 30x45, 38x40 allows to click in Walraven RapidRail® Hammerfix from both sides
- material: steel 1.0242
- pre-galvanized
- for more information about the max. allowed load ($F_{a,z}$) please refer to the loading tables or our online datasheet 'Technical Details Walraven RapidRail®'

Part No.	Type	L	B	H	s	S	RAL	BndS	BndL	App.
650527182	27x18	2.0 m	27	18	1.00	15	-	20	400	m.
650527183	27x18	3.0 m	27	18	1.00	15	-	30	600	m.
650530150	30x15	0.5 m	30	15	1.50	15	-	10	-	pc.
650530152	30x15	2.0 m	30	15	1.50	15	-	20	480	m.
650530153	30x15	3.0 m	30	15	1.50	15	-	30	720	m.
650530156	30x15	6.0 m	30	15	1.50	15	-	60	720	m.
650530202	30x20	2.0 m	30	20	1.25	15	-	20	480	m.
650530203	30x20	3.0 m	30	20	1.25	15	-	30	720	m.
650530206	30x20	6.0 m	30	20	1.25	15	-	60	720	m.
650530302	30x30	2.0 m	30	30	1.50	15	-	20	400	m.
650530303	30x30	3.0 m	30	30	1.50	15	-	30	600	m.
650530306	30x30	6.0 m	30	30	1.50	15	-	60	600	m.
6505030	30x45	2.0 m	30	45	2.00	15	RAL ¹	20	240	m.
6505630	30x45	6.0 m	30	45	2.00	15	RAL ¹	60	360	m.
6505235	38x40	2.0 m	38	40	2.00	15	-	20	100	m.
6505335	38x40	3.0 m	38	40	2.00	15	-	30	150	m.
6505635	38x40	6.0 m	38	40	2.00	15	-	60	300	m.

RAL¹ = tested, certified and monitored by a third party according to RAL-GZ 655/C.

For more information about the max. allowed load ($F_{a,z}$) please refer to the loading tables or our online datasheet 'Technical Details Walraven RapidRail®'.

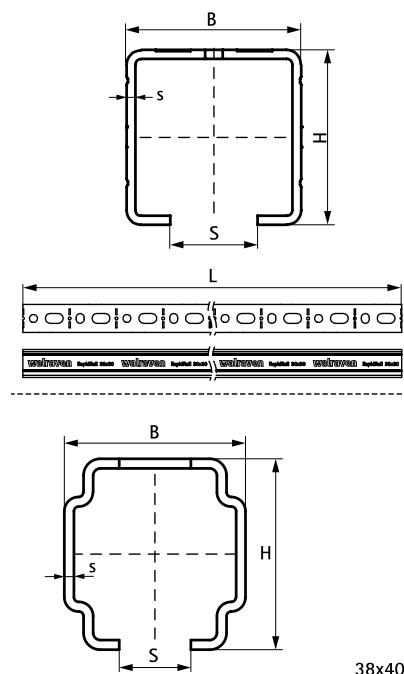

Complementary

Walraven RapidRail® Slide Nut
Walraven RapidRail® Hammerfix
Walraven RapidRail® Connector 90°

Complementary

Walraven RapidRail® Connector 135°
Walraven Rail End Cap
Walraven Rubber Strip