


Walraven RapidStrut® Base Plate G2 (BUP1000)


(H 12 03)

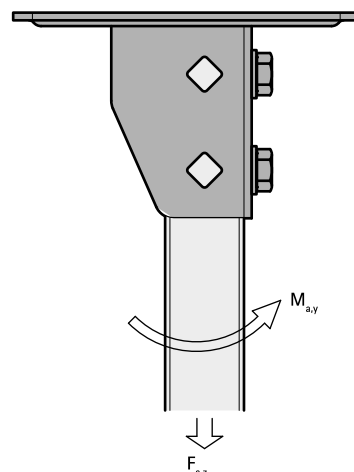

Features and Benefits

- flexible base plate for Strut rails
- suitable for all Strut rail up to 82mm height
- open side of rails 41x41 can be turned to all sides
- at high loads we advise to install with throughbolts
- timesaving with pre-assembled fasteners
- tested for fire safety according to EN 1363-1
- material: metal parts made of steel 1.0332; spring(s) made of POM (polyoxymethylene), green
- surface protection:
 - product is part of the Walraven BIS UltraProtect® 1000 system
 - suitable for in- and outdoor applications
 - stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227

Part No.	L	B	H	h	s	d1	S	k	k1	F _{a,z}	F _{a,z} 2	M _{a,y}	Pack 1
665885400	107 mm	85 (mm)	180 (mm)	56 (mm)	4.0 (mm)	20 x 14 (mm)	42 (mm)	130.5 (mm)	50 (mm)	3,636 (N)	5,151 (N)	485.0 (Nm)	10
F _{a,z} : max. allowed load in combination with 2 slide nuts M10, tightened with 40 Nm. F _{a,z} 2: max. allowed load in combination with 2 throughbolts M10, tightened with 40 Nm. M _{a,y} : max. moment in combination with 2 throughbolts M10, tightened with 40 Nm.													

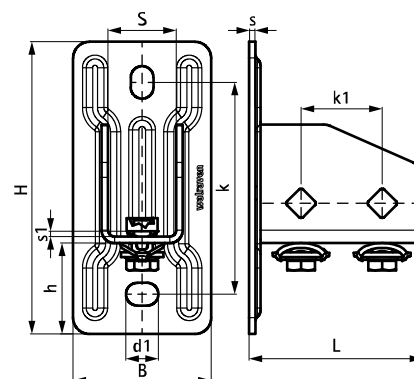

Complementary

Walraven RapidStrut® Channel DS 5 (BUP1000)
Walraven RapidStrut® Channel (BUP1000)
Walraven RapidStrut® Slide Nut

Complementary

Walraven Washer (Flat) (BUP1000)
BIS Hexagon Head Bolt (BUP1000)
WTB1 Throughbolt Anchor

Alternative

Walraven Strut Base Plate Heavy Duty (BUP1000)