


BIS RapidStrut® Rail

T- and X-Connector G2 (BUP1000)

(H 28 109)


to make Strut rail fabrications

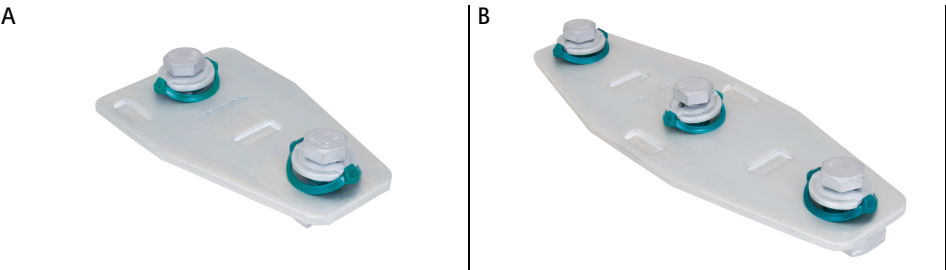

Features and Benefits

- connector with pre-assembled BIS RapidStrut® Slide nut(s)
 - to make fabrication with Strut Rail
 - ready-to-use pre-assembled for a quick fixing, and retains assembly in place before final tightening
 - 'Direct Twist' technology for easy and secure installation
 - visual guide to check the position of the slide nut
 - optimized for easy installation with electrical tools
- material: metal parts made of steel 1.0332; spring(s) made of POM (polyoxymethylene), green
 - surface protection:
 - product is part of the Walraven BIS UltraProtect® 1000 system
 - suitable for in- and outdoor applications
 - stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227

Part No.	Type	G	L	B (mm)	b (mm)	s (mm)	k (mm)	For Rail	Pack 1
A 665885213	T	M10	80 mm	131	40	5	20	Strut	20
B 665885223	X	M10	80 mm	222	40	5	20	Strut	15

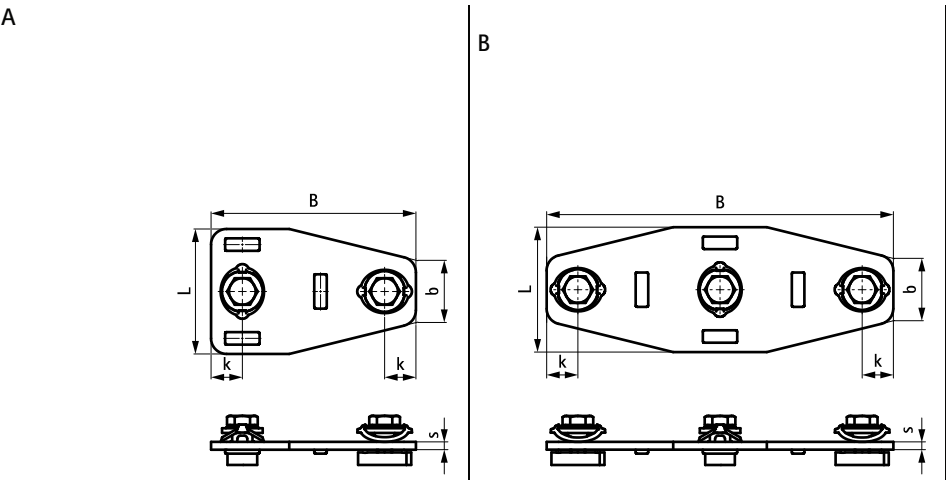

Complementary
Walraven RapidStrut® Channel DS 5
(BUP1000)