
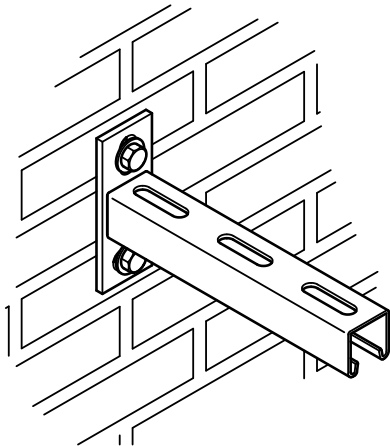


Walraven RapidStrut® Stainless Steel Cantilever Arm

(M 50 05)


fixing to wall

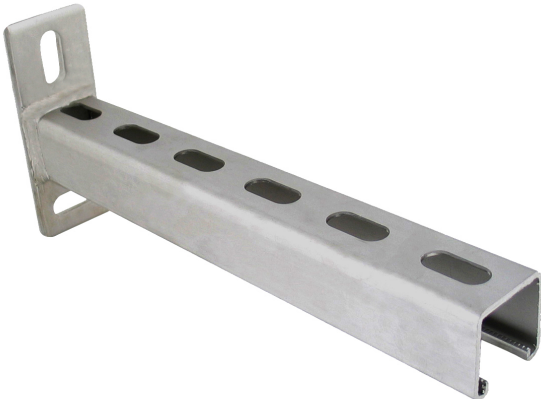

Features and Benefits

- wall plate welded on Strut Profile
 - slots at 90° to each other to simplify fixing
 - CO₂ welded
 - inward formed flanges with serrated profile for extra grip
 - tested for fire safety according to EN 1363-1
 - for more information about the max. allowed load ($F_{a,z}$) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'
- material: stainless steel 1.4401 (AISI 316)

Part No.	L	B	H	s	s1	d1	S	k	From Rail	Pack 1
		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		
6607861	150 mm	45	130	2.5	8.0	30 x 13	22	87.5	Strut 41x41	10
6607870	200 mm	45	130	2.5	8.0	30 x 13	22	87.5	Strut 41x41	10
6607862	300 mm	45	130	2.5	8.0	30 x 13	22	87.5	Strut 41x41	10
6607874	400 mm	45	130	2.5	8.0	30 x 13	22	87.5	Strut 41x41	10
6607863	450 mm	45	130	2.5	8.0	30 x 13	22	87.5	Strut 41x41	10
6607873	500 mm	45	130	2.5	8.0	30 x 13	22	87.5	Strut 41x41	10
6607864	600 mm	45	130	2.5	8.0	30 x 13	22	87.5	Strut 41x41	8
6607865	750 mm	45	130	2.5	8.0	30 x 13	22	87.5	Strut 41x41	8

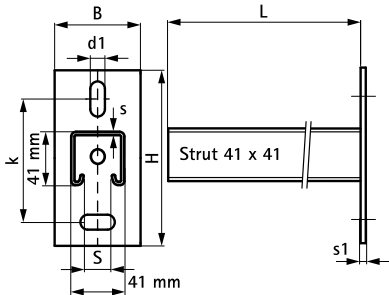

- Complementary

 - Walraven RapidStrut® Stainless Steel Slide Nut G2
 - Walraven RapidStrut® Stainless Steel Slide Nut with Tabs
 - RIS Strut Stainless Steel Tee-Bolt
- Complementary

 - Walraven RapidStrut® Stainless Steel Base Plate G2