



Walraven Strut T-Bracket


fixing to wall

(H 12 50)

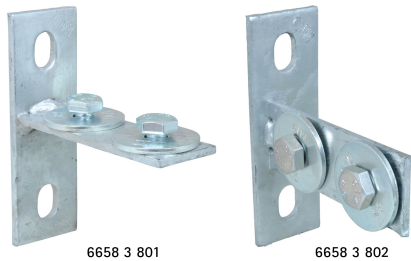

Features and Benefits

- quick installation
 - ideal for fastening RapidStrut® Fixing Rails as traverses in shafts or racks
 - suitable for rails type 21, 41 or 21 Double
 - with pre-assembled screws M10x16mm / SW17 and washers 10,5x40mm
 - zinc plated
- material: steel 1.0332

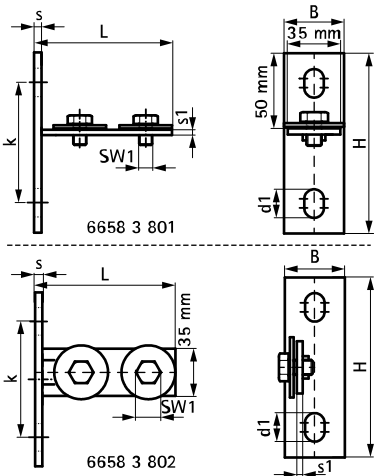

Part No.	Model	L	B	H	s	s1	d1	k	F _{a,y} (N)	F _{a,y2} (N)	F _{a,x} (N)	F _{a,x 2} (N)	Pack 1
66583801	Horizontal	104 mm	40 (mm)	120 (mm)	5.0 (mm)	4.0 (mm)	19 x 13 (mm)	80 (mm)	4,280*	9,880**	1,760*	1,980**	25
66583802	Vertical	104 mm	40 (mm)	120 (mm)	5.0 (mm)	4.0 (mm)	19 x 13 (mm)	80 (mm)	4,280*	9,880**	1,760*	1,980**	25

* F_{a,y} and F_{a,x} fixed on rail type L (1,5mm thickness) with M12 and 25Nm.
** F_{a,y2} and F_{a,x2} fixed on rail type H (2,5mm thickness) with M12 and 35Nm.