


Walraven Thread Adaptor (M/F)

adjustment of thread connection

(K 55 35)



6473XXX






6473521
6484321

Features and Benefits

- only tension loads recommended
- to enlarge or reduce the thread size in the connection of clamps, etc.
- material: steel
- zinc plated

Part No.	H (mm)	h (mm)	G1	G2	Lm1 (mm)	Lm2 (mm)	SW1 (mm)	F _{a,z} (N)	Pack 1	Pack 2
6473008	19	12	M8	M6	7.0	5.5	13	2,500	100	1,000
6473207	22	12	M8	M7F	7.0	8.0	13	2,500	50	1,000
6473108	21	14	M7F	M8	7.0	5.5	13	4,800	50	500
6473206	20	12	M6	M8	7.0	6.0	13	4,800	100	1,000
6473210	23	15	M10	M8	9.0	6.0	13	4,800	100	1,000
6473212	23	15	M12	M8	8.0	6.0	17	4,800	50	500
6473221	30	22	G1/2	M8	13.0	8.0	27	4,800	50	250
6473306	21	13	M6	M10	7.0	6.0	13	5,900	100	1,000
6473308	21	13	M8	M10	7.0	6.0	13	5,900	100	1,000
6473312	25	15	M12	M10	8.0	8.0	17	5,900	50	500
6473316	32	22	M16	M10	13.0	8.0	24	5,900	25	250
6473321	31	21	G1/2	M10	12.0	8.0	27	5,900	25	250
6473408	23	13	M8	M12	7.0	7.5	13	8,800	50	1,000
6473410	23	13	M10	M12	8.0	7.5	13	8,800	50	1,000
6473416	32	22	M16	M12	11.0	8.0	24	8,800	50	250
6473510	32	18	M10	M16	9.0	11.0	19	10,800	50	250
6473512	32	18	M12	M16	10.0	11.0	19	19,900	50	250
6473421	26	11	M10	G1/2	9.0	13.0	27	10,800	25	125
6484321	8	-	M10	G1/2	8.0	-	-	11,900	50	500
6473521	15	-	M16	G1/2	15.0	-	-	19,900	100	1,000
6473621	25	15	G3/4	G1/2	12.0	7.0	-	12,700	25	250
6473721	32	20	G1	G1/2	17.0	9.0	-	5,500	10	100

M7F: pitch = M7 x 1.5mm.

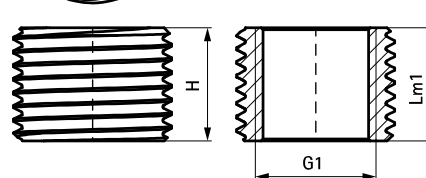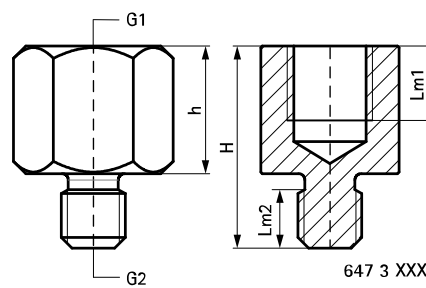

647 3 521 /
648 4 321