


Walraven Yeti® 335 Frame Set

for Rooftop Installations

(1 04 15)



6768 5 501



6768 5 502



Features and Benefits


- complete set for supporting installation appliances on flat roofs
 - suitable for wide range of commonly used airco's, ventilation units, etc.
 - with non-slip anti-vibration mat
 - predefined load capacity: calculation not necessary
 - device can't be heavier than 150 kg
 - top of device can't be higher than 1.2 m over the roof level
 - mouldings made of WPC, a composite of recycled plastic and wood fibre
 - surface protection:
 - product is part of the Walraven BIS UltraProtect® 1000 system
 - suitable for in- and outdoor applications
 - stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
 - noise reduction according to DIN EN ISO 10140-1 and DIN EN ISO 10140-3 up to 31 dB(A)
 - sets meet the requirements of DIN 18531-1
 - UV-resistance according to EN ISO 16474-3:2014-02 - certified by ITB
- Part No. 67685501: consisting of:
 - 4 x BIS Yeti® 335 including non-slip anti-vibration mat (made of rubber)
 - 2 x 1.5 m BIS RapidStrut® Fixing Rail DS 5 (BUP1000), pre-assembled with vertical legs of 0.5 m on both sides, ready to just plug in the BIS Yeti® 335
 - 2 x 1 m BIS RapidStrut® Fixing Rail DS 5 (BUP1000), as a cross-connection to the frame. Connecting elements are already pre-installed on the frame
 - all connecting elements, rail end caps and bolts are included and most are pre-assembled
 - Part No. 67685502: consisting of:
 - 6 x BIS Yeti® 335 including non-slip anti-vibration mat (made of rubber)
 - 2 x 2 m and 4 x 1.5 m pre-cutted BIS RapidStrut® Fixing Rail DS 5 (BUP1000), for use as longitudinal and transverse rails
 - 6 x 0.5 m BIS RapidStrut® Fixing Rail DS 5 (BUP1000), for use as vertical legs with pre-assembled connecting elements
 - all connecting elements, rail end caps and bolts are included and most are pre-assembled




Nr.
1762-001-19



ITB No.
LZM00-02259

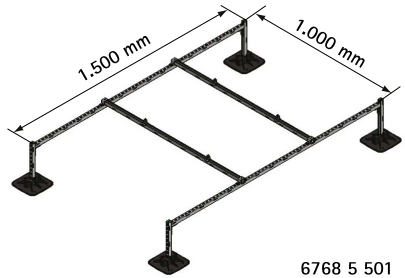

6768 5 501

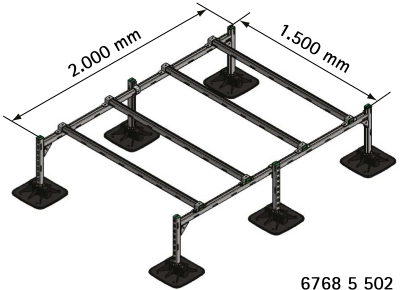

6768 5 502

| Part No. | Model | Pack 1 |
|--|---|--------|
| 67685501 | BIS Yeti® 335 for 1 installation appliance | 1 |
| 67685502 | BIS Yeti® 335 for 2 installation appliances | 1 |
| Before mounting, the roof load capacity has to be confirmed by a structural engineer. If changes to the mounting parameters is necessary then please contact Walraven Technical Department. | | |

Complementary
Walraven Yeti® Triplex Separation Layer

Alternative
Walraven Yeti® 280 Support System