


starQuick® Fixing Nut

(C 05 65)

accessories BIS starQuick® Pipe Clamps without Nut

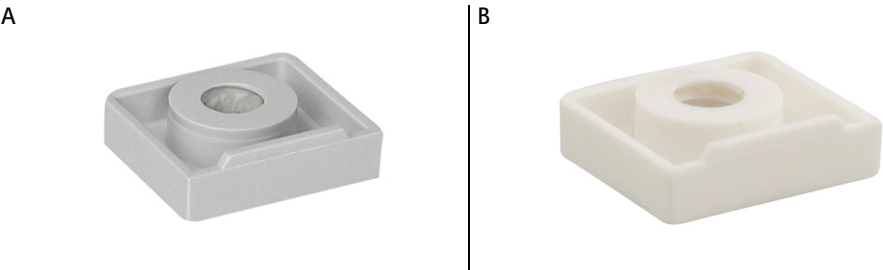

Features and Benefits

- to make a threaded connection in a starQuick® Clamp
  - entirely integrated in clamp (not protruding)
  - material: PC (polycarbonate), grey or white
- no corrosion
  - temperature resistance from approx. -35 °C to approx. +110 °C (constant); short to approx. +125 °C

| Part No.  | G   | Colour           | Pack 1 | Pack 2 |
|-----------|-----|------------------|--------|--------|
| A 0854006 | M6  | Grey (RAL 7035)  | 100    | 1,000  |
| B 0855006 | M6  | White (RAL 9003) | 100    | 1,000  |
| A 0854007 | M7B | Grey (RAL 7035)  | 100    | 1,000  |
| A 0854307 | M7F | Grey (RAL 7035)  | 100    | 1,000  |
| A 0854308 | M8  | Grey (RAL 7035)  | 100    | 1,000  |

M7B: pitch = M7 x 1 mm.

M7F: pitch = M7 x 1.5mm.

