



In-Wall Strut WM0

(G 04 220)

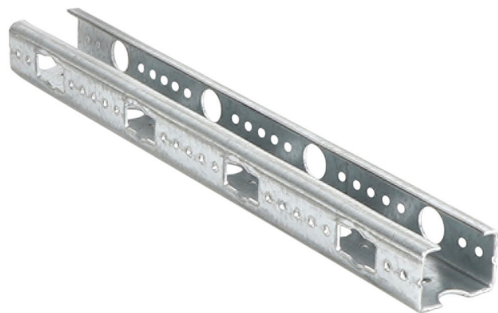

Features and benefits

- once hung or mounted, this is used to support vertical or horizontal piping with attachments
- channel side fits RapidRail®, starQuick® and stub-out accessories
- pre-punched holes fit 3/8" threaded rod and angled wall bracket accessories
- pre-drilled holes allow for secure mounting of starQuick®, Rabbit clamp and BISMAT® clamps using a Quick Hanger Bolt
- material: steel 1.0226
- pre-galvanized



Part No.	Type	L	B (")	H (")	s (Ga)	S (")	Pack 1	App.
650509008	WM0	8"	1 1/6	5/7	18	5/8	25	pc.
650509012	WM0	12"	1 1/6	5/7	18	5/8	25	pc.
650509018	WM0	18"	1 1/6	5/7	18	5/8	25	pc.
650509022	WM0	22"	1 1/6	5/7	18	5/8	25	pc.
650509032	WM0	32"	1 1/6	5/7	18	5/8	25	pc.
650509000	WM0	7 ft.	1 1/6	5/7	18	5/8	-	pc.

