

Walraven RapidRail® Fixing Rail

for light fixing applications

(G 04 05)




Features and benefits

- C-profile
- for quick and easy fixing
- with continuous perforation
- distance between rail end and first hole is always equal
- continuous graduated centimeter scale on one side
- material: steel 1.0242
- pre-galvanized
- for more information about the max. allowed load ( $F_{a,z}$ ) please refer to the loading tables or our online datasheet 'Technical Details BIS RapidRail®'

| Part No. | Type | L     | B<br>(") | H<br>(") | s<br>(Ga) | S<br>(") | BndS | BndL | App. |
|----------|------|-------|----------|----------|-----------|----------|------|------|------|
| 65059502 | WM15 | 10"   | 1 3/16   | 3/4      | 16        | 5/8      | 20   | -    | ft.  |
| 65059505 | WM15 | 20"   | 1 3/16   | 3/4      | 16        | 5/8      | 10   | -    | ft.  |
| 65059510 | WM15 | 3' 3" | 1 3/16   | 3/4      | 16        | 5/8      | 10   | -    | ft.  |

For more information about the max. allowed load ( $F_{a,z}$ ) please refer to the loading tables or our online datasheet 'Technical Details BIS RapidRail®'.

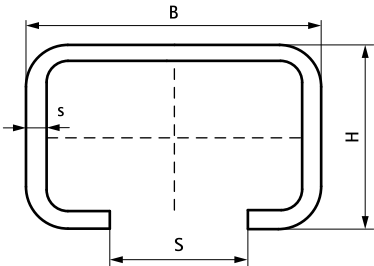

Complementary

- Walraven Rail End Cap
- Walraven RapidRail® Connector 90°
- Walraven RapidRail® Connector 135°