

Walraven Yeti® 335 Support System

for Rooftop Installations

(1 04 10)



Features and benefits

- modular supporting system for HVAC equipment, solar panels, walkways, pipe work, cable runs, etc.
- for flat roofs
- for horizontal and vertical applications
- 360° rotatable insert for BIS RapidStrut® 1-5/8" x 1-5/8" or BIS RapidStrut® DS 5 (1-5/8" x 2")
- with non-slip anti-vibration mat
- noise reduction according to DIN EN ISO 10140-1 and DIN EN ISO 10140-3 up to 31 dB(A)
- UV-resistance according to EN ISO 16474-3:2014-02 - certified by ITB
- BIS Yeti 335 H-set consisting of:
 - 2 x BIS Yeti® 335 including non-slip anti-vibration mat (made of rubber)
 - 4 x BIS Strut Connector 90°
 - 8 x hexagon head bolts and strut nuts
- mouldings made of WPC, a composite of recycled plastic and wood fibre
- resistant to UV and chemical influences



Nr.
1762-001-19



ITB No.
LZM00-02259




Part No.	Model	B	B	H	H	h	h	F _{a,z}	F _{a,z}	F _{a,z} 2	F _{a,z} 2	M _{a,y}	M _{a,y}	Pack 1	Pack 2
		(mm)	(")	(mm)	(")	(mm)	(")	(N)	(lbf)	(N)	(lbf)	(Nm)	(ft-lb)		
67685201	Vertical	335	13 3/16	96	3-3/4	20	13/16	20,000*	4,496*	30,000**	6,744**	200.0	147.5	1	90
67685302	H-set (with out Strut Rail)	335	13 3/16	100	3-3/4	20	13/16	-	-	-	-	200.0	-	1	32

* = Max. allowed load without taking influence of insulation into account, using RapidStrut® channel type 41/H

For a detailed calculation and for support how to spread the load please contact Walraven Technical Support.

In cases where a foot is used in roof applications, the installer is obliged to verify maximum load capacity of roof before installation.

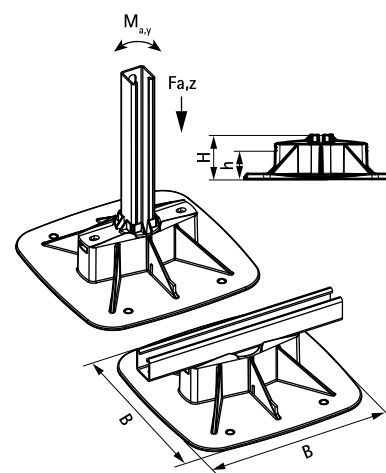

Alternative

Walraven Yeti® 130 Support System