


Walraven Strut Soporte soldado reforzado

(H 08 15)

fijación a pared

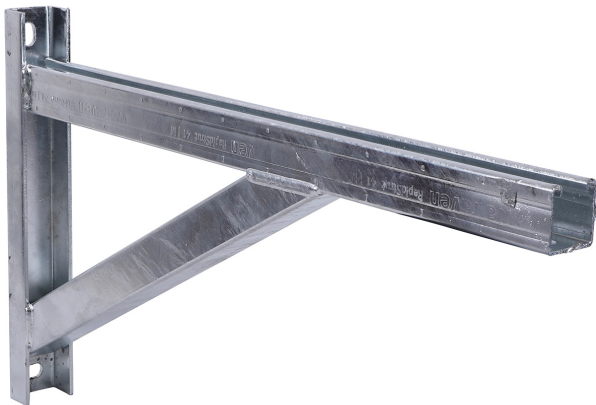

Características y ventajas

- U-shaped baseplate with welded channel and welded support beam
- strong cantilever arm for applications with higher loads or extra safety required
- soldado al CO₂
- con bordes interiores con perfil serrado para un agarre adicional
- material: acero 1.0332
- galvanizado en caliente

Pieza N°	L	B	H	s	d1	k	De carril	F _{a,z} (N)	U.m.v.1
6601894	600 mm	50	350	4,0	20 x 13	307,5	Strut 41x41	1.400	1

