
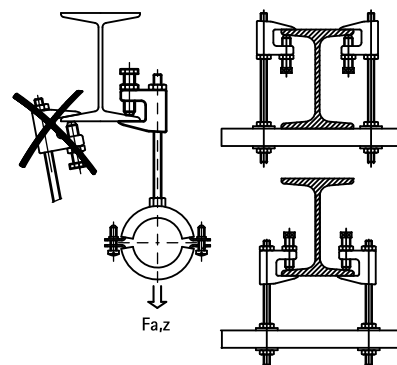


BIS C-klema

for flange do 28 mm

(K 20 05)

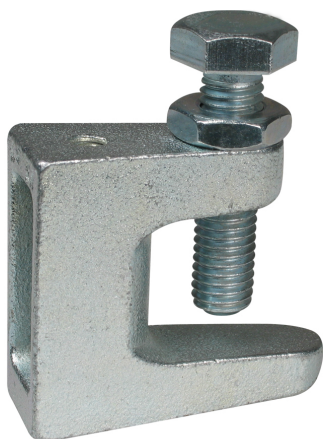

Prednosti i osobine

- za fleksibilnu i jednostavnu montažu na čelične konstrukcije bez bušenja i varenja
- prema VdS-normi C klemo koje se upotrebljavaju za pričvršćenje sprinkler instalacija većih od DN65 fiksiraju se isključivo uz upotrebu sigurnosne trake koja sprečava klizanje klemo po gredi pri velikom opterećenju
- materijal: klemo metalna; vijak od tvrdog čelika, navojnica od čelika; elektrolizom cinkovano
- see also: BIS Safety Strap (page K 20 06)
- šesterokutni vijak po normi DIN 933 klase 8.8, navoj po normi EN ISO 4753 i kontra navojnica



Art.br.	Kode	A (mm)	R	G	B (mm)	H (mm)	SW1 (mm)	F _{a,z} (N)	FM	UL	VdS	KK
6003206	TKN8-M6	≤18	M6	M8	38	35	13	1.200	-	-	-	50
6003006	TK10-M6	≤23	M6	M10	50	45	17	2.500	-	-	-	50
6003208	TKN8-M8	≤18	M8	M8	38	35	13	1.200	-	-	VdS	50
6003008	TK10-M8	≤23	M8	M10	50	45	17	2.500	-	-	VdS	50
6003010	TKN10-M10	≤20	M10	M10	44	42	17	2.500	FM	UL	VdS	50
6003310	TK16-M10	≤28	M10	M12	58	58	19	2.500	FM	UL	VdS	25
6003012	TK12-M12	≤26	M12	M10	58	54	17	3.500	FM	UL	VdS	25
6003016	TK16-M16	≤28	M16	M12	58	58	19	5.500	FM	UL	VdS	25
6003905	TKN8-D9	≤18	Ø 9 mm	M8	38	35	13	1.200	-	-	VdS	50
6003906	-	≤18	Ø 7 mm	M8	38	35	13	1.200	-	-	-	50
6003908	TK10-D9	≤23	Ø 9 mm	M10	50	45	17	2.500	-	-	VdS	50
6003910	TKN10-D11	≤20	Ø 11 mm	M10	44	42	17	2.500	FM	UL	VdS	50
6003912	TK12-D13	≤26	Ø 13 mm	M10	58	54	17	3.500	FM	UL	VdS	25

Šesterokutni vijak rukom zavrtiti + 1/2 kruga dotegnuti sa ključem. Kontra navojnicu rukom zavrtiti + 1/8 kruga dotegnuti sa ključem. Sertifikati dostupni na upit.

