


BIS Slide Block GFRP (BUP1000)


(E 10 45)

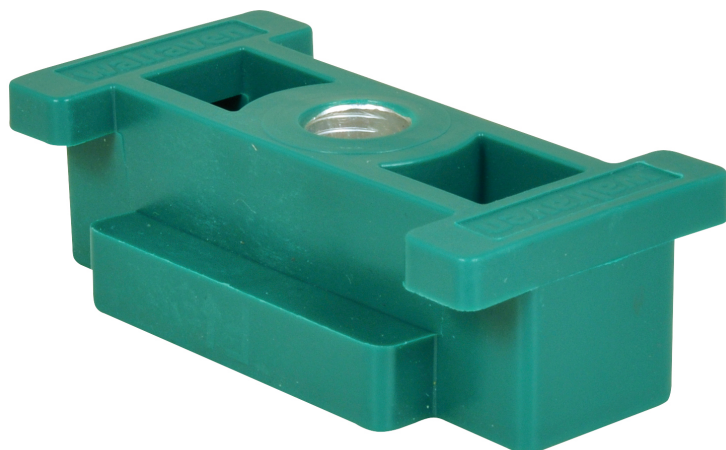

Prednosti i osobine

- flexible sliding element for pipe extensions
- can also be used as a cross-slide
- suitable for all BIS RapidStrut® Fixing Rail excluding DS5
- suitable for ceiling mounting (hanging) and floor mounting (standing mounted)
- very low installation height, little space requirement
- movement freely selectable, limitations and securing by U-washers
- material: hanger nut made of steel; plastic part made of Polyamide 6 (PA6), 30% glass fiber reinforced
- sliding friction coefficient $\mu = 0,30$
- zaštita materijala:
 - proizvod je deo Walraven BIS UltraProtect® sistema
 - pogodan za unutrašnju i spoljašnu upotrebu
 - izdržava min. 1 000 sati sonog sprej testa (max. 5% crvene rdje) prema ISO standardu 9227
 - postojano na temperaturu od $-30\text{ }^{\circ}\text{C}$ do $+90\text{ }^{\circ}\text{C}$

Art.br.	G	L	B (mm)	H (mm)	$F_{a,z}$ (N)	KK
6662810	M10	70 mm	35	22	1.550	20

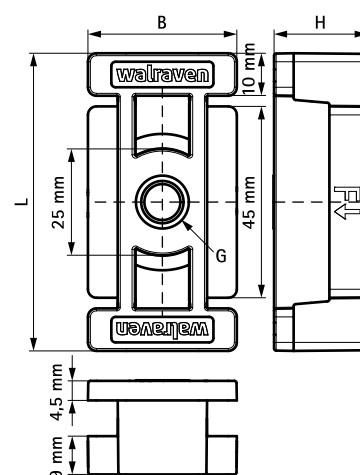

Kompetabilno

Walraven RapidStrut® Montažna šina
(BUP1000)
Walraven RapidStrut® Profilna šina (s.c.)

Alternativa

BIS Expansion Devices