


BIS Šestougaoni štift (BUP1000)

za instaliranje montažne šine

(K 45 54)

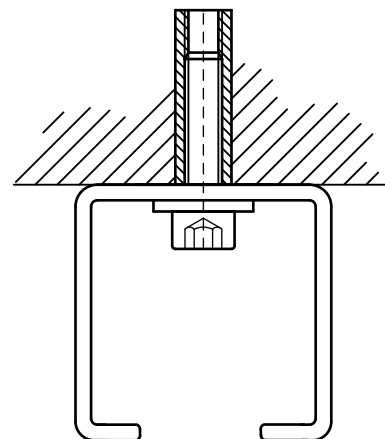


Prednosti i osobine

- za instaliranje montažne šine
- materijal: čelik, klasa snage 8.8
- zaštita materijala:
 - proizvod je deo Walraven BIS UltraProtect® sistema
 - pogodan za unutrašnju i spoljašnu upotrebu
 - izdržava min. 1 000 sati sonog sprej testa (max. 5% crvene rdje) prema ISO standardu 9227
- DIN 912 standard

Art.br.	G	L	B (mm)	b (mm)	s (mm)	KK
61380825	M8	25 mm	13	6	8,0	200
61380860	M8	60 mm	13	6	8,0	200
61380880	M8	80 mm	13	6	8,0	100
61381025	M10	25 mm	16	8	10,0	200
61381030	M10	30 mm	16	8	10,0	200
61381230	M12	30 mm	18	10	12,0	100
61381260	M12	60 mm	18	10	12,0	100

Potrebni štift zavisi od perforacije šine.

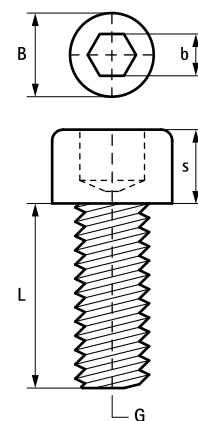

Kompetabilno

WDI1 Drop-in Anchor
WDI1L Drop-in Anchor Lipped
WDI1 Drop-in Anchor SSt

Kompetabilno

WDI1 Setting tool
WBA Brass Anchor
BIS Mesing tiplu