


BIS Strut Stainless Steel Connector 90° Rigid

(M 60 04)

konstrukcije sa profilnim šinama Strut

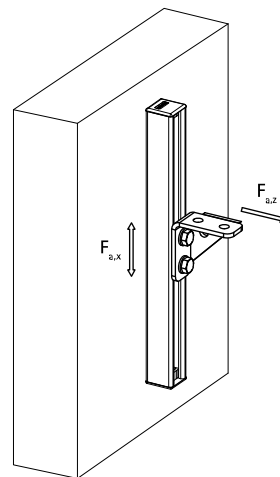

Prednosti i osobine

- reinforced connector to make rigid fabrications with Strut rails
- montagevriendelijk door afgeronde vormgeving
- material: stainless steel 1.4404 (A4) - EN 10088, AISI 316L

Art.br.	L	B	H	s	d1	k	a	Za šina	$F_{a,z}$ (N)	$F_{a,z\ 2}$ (N)	$F_{a,x}$ (N)	$F_{a,x\ 2}$ (N)	KK
66587291	110 mm	40 (mm)	110 (mm)	4 (mm)	12,2 (mm)	50 (mm)	90° (°)	Strut	4.000	8.000	3.000	7.000	25

$F_{a,z}$: max. allowed load acc. RAL GZ-655D (with rail 41x41x1.5).
 $F_{a,z2}$: max. allowed load (with rail 41x41x2.5).
 $F_{a,x}$: max. allowed load acc. RAL GZ-655D (with rail 41x41x1.5 and bolted 2 x M12 - 30Nm).
 $F_{a,x2}$: max. allowed load (with rail 41x41x2.5 and bolted 2 x M12 - 60Nm).

