


BIS Strut Stainless Steel T-shape Base Plate

(M 53 10)

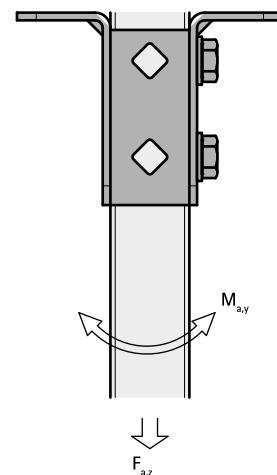


Prednosti i osobine

- highly flexible head plate for strut rails
- open side of the rail can be turned to all sides
- extra safety by reinforced bending
- hole pattern is adapted to the hole pattern of strut rails
- material: stainless steel 1.4404 (A4) - EN 10088, AISI 316L

Art.br.	L	B	H	h	s	d1	S	k	k1	F _{a,z}	F _{a,z} 2	M _{a,y}	KK
		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(N)	(N)	(Nm)	
66587361	138 mm	45	100	91	4,0	18 x 12	42	95	50	3.636	3.636	164,0	10

F_{a,z}: max. allowed load in combination with 2 slide nuts M10, tightened with 40 Nm.
F_{a,z} 2: max. allowed load in combination with 2 throughbolts M10, tightened with 40 Nm.
M_{a,y}: max. moment in combination with 2 throughbolts M10, tightened with 40 Nm.

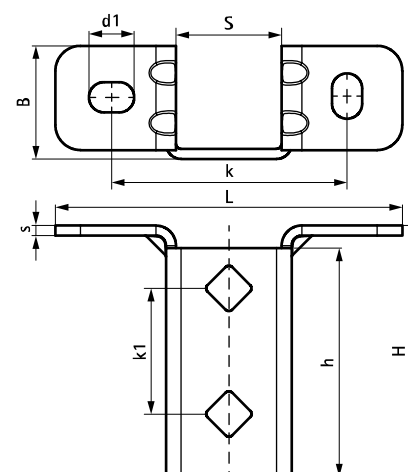

Kompetabilno

Walraven RapidStrut® Stainless Steel
 Channel Double
 WTB1 Throughbolt Anchor SSt
 WDI1 Drop-in Anchor SSt