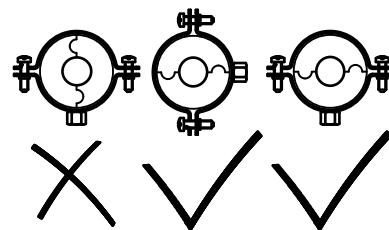


BISOFIX® E13 + 2S

za rashladne medije 8,0 - 168,3 mm

(D 03 04)

**Prednosti i osobine**

- for combination with elastomeric foam insulation
- vapourproof glueable with pipe insulation
- insulating pipe support with 2S clamp
- 2S clamp with M8/M10 connection nut
- ne sadrži FCKW, HFCKW, formaldehid ili kadmium supstance
- otpornost na požar klasa: B2
- PIR density for D <80mm = 80kg/m³
- PIR density for D >80mm = 120kg/m³
- elektrilzom cinkovan
- temperature range -45 °C - +105 °C

Art.br.	D (mm)	Model	F _{a,z} (N)	KK
I133303008	8,0	BISOFIX® E13 + 2S Clamp	100	50
I133303010	10,2	BISOFIX® E13 + 2S Clamp	100	50
I133303012	12,0	BISOFIX® E13 + 2S Clamp	100	50
I133303015	15,0	BISOFIX® E13 + 2S Clamp	100	50
I133303018	17,2 - 18,0	BISOFIX® E13 + 2S Clamp	100	50
I133303022	21,3 - 22,0	BISOFIX® E13 + 2S Clamp	100	50
I133303028	26,9 - 28,0	BISOFIX® E13 + 2S Clamp	100	50
I133303035	33,7 - 35,0	BISOFIX® E13 + 2S Clamp	100	50
I133303042	42,4	BISOFIX® E13 + 2S Clamp	150	50
I133303048	48,3	BISOFIX® E13 + 2S Clamp	225	50
I133303054	54,0	BISOFIX® E13 + 2S Clamp	225	50
I133303057	57,0	BISOFIX® E13 + 2S Clamp	350	50
I133303060	60,3	BISOFIX® E13 + 2S Clamp	350	50
I133303064	64,0	BISOFIX® E13 + 2S Clamp	350	50
I133303070	70,0	BISOFIX® E13 + 2S Clamp	425	50
I133303076	76,1	BISOFIX® E13 + 2S Clamp	575	25
I133303089	88,9	BISOFIX® E13 + 2S Clamp	875	25
I133303102	101,6	BISOFIX® E13 + 2S Clamp	1.000	25
I133303108	108,0	BISOFIX® E13 + 2S Clamp	1.075	25
I133303114	114,3	BISOFIX® E13 + 2S Clamp	1.250	25
I133303133	133,0	BISOFIX® E13 + 2S Clamp	1.475	25
I133303140	139,7	BISOFIX® E13 + 2S Clamp	1.700	5
I133303160	159,0 - 160,0	BISOFIX® E13 + 2S Clamp	1.950	5
I133303168	168,3	BISOFIX® E13 + 2S Clamp	2.125	5