


## BISOFIX® E19 + HD500

(D 03 20)

za rashladne medije 76,1 - 219,1 mm

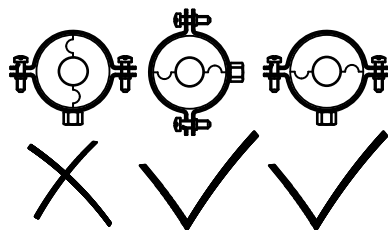

## Prednosti i osobine

- for combination with elastomeric foam insulation
- vapourproof glueable with pipe insulation
- insulating pipe support with HD500 clamp
- HD500 clamp with M8/M10 and M10/M12 connection nut
- ne sadrži FCKW, HFCKW, formaldehid ili kadmium supstance
- otpornost na požar klasa: B2
- PIR density for D <80mm = 80kg/m<sup>3</sup>
- PIR density for D >80mm = 120kg/m<sup>3</sup>
- zaštita materijala:
  - proizvod je deo Walraven BIS UltraProtect® sistema
  - pogodan za unutrašnju i spoljašnju upotrebu
  - izdržava min. 1 000 sati sonog sprej testa (max. 5% crvene rdje) prema ISO standardu 9227
- temperature range -45 °C - +105 °C

| Art.br.    | D<br>(mm)     | Model                      | F <sub>a,z</sub><br>(N) | KK |
|------------|---------------|----------------------------|-------------------------|----|
| I193304076 | 76,1          | BISOFIX® E19 + HD500 Clamp | 575                     | 25 |
| I193304089 | 88,9          | BISOFIX® E19 + HD500 Clamp | 875                     | 25 |
| I193304102 | 101,6         | BISOFIX® E19 + HD500 Clamp | 1.000                   | 15 |
| I193304108 | 108,0         | BISOFIX® E19 + HD500 Clamp | 1.075                   | 15 |
| I193304114 | 114,3         | BISOFIX® E19 + HD500 Clamp | 1.250                   | 15 |
| I193304133 | 133,0         | BISOFIX® E19 + HD500 Clamp | 1.475                   | 5  |
| I193304140 | 139,7         | BISOFIX® E19 + HD500 Clamp | 1.700                   | 5  |
| I193304160 | 159,0 - 160,0 | BISOFIX® E19 + HD500 Clamp | 1.950                   | 5  |
| I193304168 | 168,3         | BISOFIX® E19 + HD500 Clamp | 2.125                   | 5  |
| I193304219 | 219,1         | BISOFIX® E19 + HD500 Clamp | 3.525                   | 2  |