


## BISOFIX® PIR30

za rashladne medije 12,0 - 323,9 mm


(D 03 60)

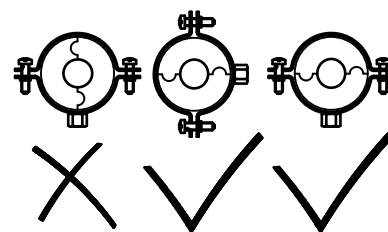

## Prednosti i osobine

- for combination with rigid foam insulation
- cover joints with aluminium tape
- ne sadrži FCKW, HFCKW, formaldehid ili kadmium supstance
- otpornost na požar klasa: B2
- PIR density for  $D < 110\text{ mm}$  =  $80\text{ kg/m}^3$
- PIR density for  $D > 110\text{ mm}$  =  $120\text{ kg/m}^3$
- thermal conductivity lambda (approx. value):  $0.30\text{ W/(mK)}$
- temperature range  $-45\text{ °C} - +105\text{ °C}$

| Art.br.    | D<br>(mm)     | D<br>(°) | DN  | L      | H<br>(mm) | s<br>(mm) | F <sub>b,z</sub><br>(N) | KK |
|------------|---------------|----------|-----|--------|-----------|-----------|-------------------------|----|
| I300000012 | 12,0          | -        | -   | 75 mm  | 72,0      | 30,0      | 130                     | 25 |
| I300000015 | 15,0 - 16,0   | -        | -   | 75 mm  | 75,0      | 30,0      | 170                     | 25 |
| I300000018 | 17,2 - 18,0   | 3/8      | 10  | 75 mm  | 78,0      | 30,0      | 190                     | 25 |
| I300000022 | 21,3 - 22,0   | 1/2      | 15  | 75 mm  | 82,0      | 30,0      | 230                     | 25 |
| I300000034 | 33,7 - 35,0   | -        | -   | 75 mm  | 95,0      | 30,0      | 320                     | 25 |
| I300000042 | 42,4          | 1 1/4    | 32  | 75 mm  | 102,4     | 30,0      | 350                     | 25 |
| I300000048 | 48,3          | 1 1/2    | 40  | 75 mm  | 108,3     | 30,0      | 370                     | 25 |
| I300000054 | 54,0          | -        | -   | 75 mm  | 114,0     | 30,0      | 380                     | 25 |
| I300000057 | 56,0 - 57,0   | -        | -   | 75 mm  | 117,0     | 30,0      | 390                     | 25 |
| I300000060 | 60,3          | 2        | 50  | 75 mm  | 120,3     | 30,0      | 410                     | 25 |
| I300000064 | 64,0          | -        | -   | 75 mm  | 124,0     | 30,0      | 420                     | 25 |
| I300000070 | 70,0          | -        | -   | 75 mm  | 130,0     | 30,0      | 440                     | 25 |
| I300000076 | 76,1          | 2 1/2    | 65  | 75 mm  | 136,1     | 30,0      | 460                     | 25 |
| I300000089 | 88,9          | 3        | 80  | 75 mm  | 148,9     | 30,0      | 500                     | 15 |
| I300000102 | 101,6         | -        | -   | 75 mm  | 161,6     | 30,0      | 550                     | 15 |
| I300000108 | 108,0         | -        | -   | 75 mm  | 168,0     | 30,0      | 620                     | 15 |
| I300000114 | 114,3         | 4        | 100 | 100 mm | 174,3     | 30,0      | 1.370                   | 15 |
| I300000133 | 133,0         | -        | -   | 100 mm | 193,0     | 30,0      | 1.520                   | 5  |
| I300000140 | 139,7         | 5        | 125 | 100 mm | 199,7     | 30,0      | 1.570                   | 5  |
| I300000160 | 159,0 - 160,0 | -        | -   | 100 mm | 220,0     | 30,0      | 1.720                   | 5  |
| I300000168 | 168,3         | 6        | 150 | 100 mm | 228,3     | 30,0      | 2.720                   | 8  |
| I300000219 | 219,1         | 8        | 200 | 150 mm | 279,1     | 30,0      | 4.210                   | 2  |
| I300000273 | 273,1         | -        | -   | 150 mm | 333,0     | 30,0      | 5.020                   | 2  |
| I300000324 | 323,9         | -        | -   | 150 mm | 384,0     | 30,0      | 5.790                   | 2  |

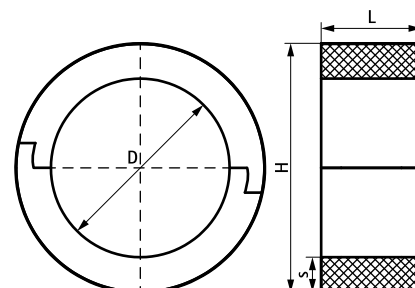

## Kompetabilno

Walraven Extra teške obujmice HD500  
(BUP1000)