
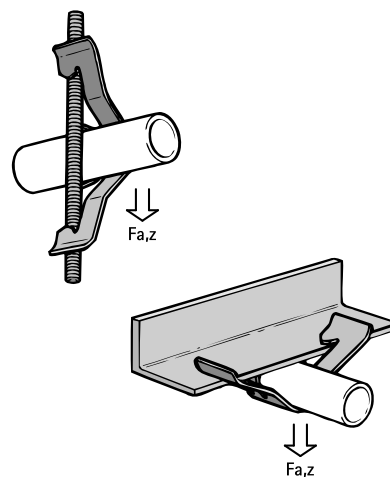


Britclips® TRC

for threaded rods or flanges 16 - 20 mm

(J 25 05)

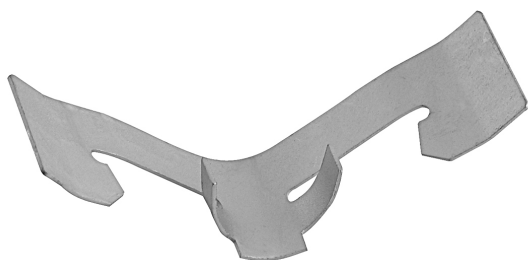

Prednosti i osobine

- voor snelbevestiging aan draadstangen of spanten zonder boren of lassen
- zaštita materijala: Delta-Tone 9000 (480 uur)
- materiaal: verenstaal (tipa C67S po EN10132)

Art.br.	Kode	D (mm)	A (mm)	R	F _{a,z} (N)	KK	VP
55922510	TRCM10	16 - 20	6 - 9	M6 - M8 / M10	450	100	400

*For use with static loads only.
Load shown is for beam application, for rod application $F_{a,z} = 220$ N.*

